




**Lux Strip Light Driver - Regulated with built in stabilizer**

PART DESCRIPTION		LUX STRIP LIGHT DRIVER - REGULATED WITH BUILT IN STABILIZER
Part Number	60-0383	
For Use With	All Lumishore LED Strip Lights	
Ingress Protection Rating	IP68	
Features	Full Spectrum RGB and White Color Temperature Tunable (2700K to 6500K) Full Lumi-Link Capability for Lux Smart Lighting Specially Designed for Ease of Installation Plug and Play Connections	
Warranty	2 years	
Customer Control Options	Lumi-Link Command Center Customer Supplied Momentary Switch	
Electrical Installation	Plug and Play	

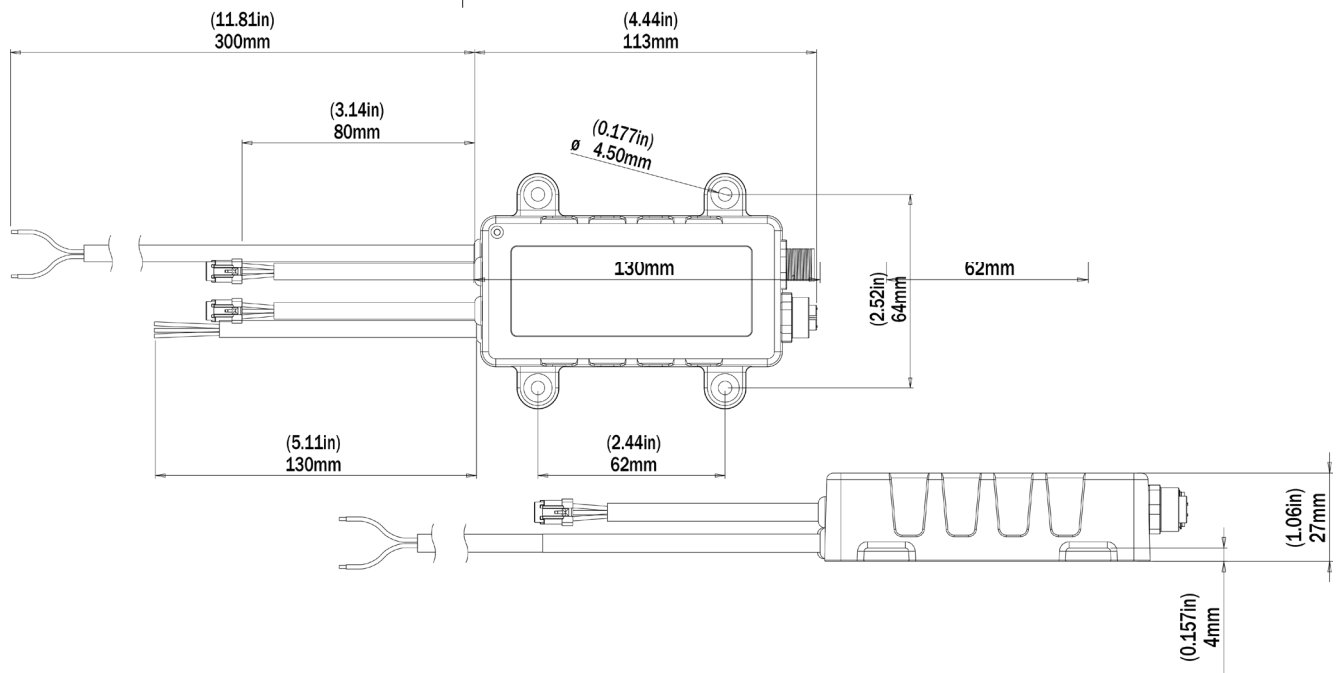

TECHNICAL	
Driver	Multi-Channel Internal Driver
Supply Voltage Range	10.5 - 31 V DC
Max Current Draw (12/24V DC)	5.6A / 2.8A
Surge Protection	Yes
ATRB (Automatic Thermal Roll Back)	Yes
Low Voltage Protection	Yes
Auto Power Control	Yes - Intelligent Multi-Channel Power Management
“Soft Start” Electronics Protection	Yes
Reverse Polarity Protection	Yes
In Rush Current Protection	Yes
Power Line Noise Suppression	Yes
Max Cable Length to start of LED strip	5m (16.8')
Number of LED strips per Driver	Multiple LED Strips - up to 10m (32.8') total strip length
ISO 8846 (Ignition Protection)	Yes

PHYSICAL	
Ingress Protection	IP68
Size - Not Including Cable Glands or cables (LxWxH)	113mm x 79mm x 27mm (4.44" x 3.1" x 1.1")
Case Construction	Powder Coated Marine Grade Aluminium

ACCESSORIES	
Accessory	Part number
Lumi-Link Command Center	60-0366
Lux Strip Light - 90 LED per meter - IP 68	60-0378
Lux Superbright Strip Light - 180 LED per meter - IP 68	60-0379
Lux Strip Light - 90 LED per meter - IP 22	60-0380
Lux Superbright Strip Light - 180 LED per meter - IP 22	60-0381
Lux Superbright Neon Flex - 180 LED per meter - IP 68	60-0382
Strip light extension cable - 1m	60-0385
Strip light extension cable - 2m	60-0386
Strip light extension cable - 3m	60-0387
Strip light extension cable - 4m	60-0388
Strip light extension cable - 5m	60-0389
6-core cable splitter - 2 way	60-0438
6-core cable splitter - 3 way	60-0439

