WHITE











ABOVEWATER LED SPOT LIGHT

PART DESCRIPTION	WHITE CURVED LED SPOT LIGHT 50"
Part Number	60-0474
Available Colors	White (5000 K)
Lumens	89,100
Fixture Lumens (White)	39,600
Number & Type Of LED	100 x 10W White LED
LED Power - HICOB Array	Yes
Typical LED Life	50,000+ Hours
Warranty	2 Years
User Control Options	On/Off Switch (Third party supplied) Eclipse Command Center Lumi-Link Command Center
Electrical Installation	Simple 2 Wire Connection (3 Wires when used with Eclipse Command Center, or Lumi-Link Command Center)
Housing Type	Powder Coated Aluminium Body with Makrolon Lens



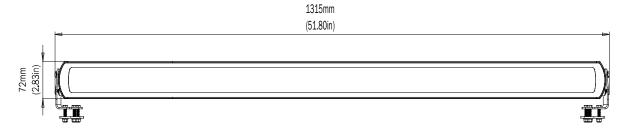





## **WHITE**

## Curved Spot Light - 50"

ABOVEWATER LED SPOT LIGHT

TECHNICAL		
Driver	Internal Driver	
Supply Voltage Range	10.5-31 V DC	
Max Current Draw 12/24V	32 A/16 A	
Surge Protection	Yes (3,000V)	
ATRB (Automatic Thermal Roll- Back)	Yes	
Low Voltage Protection	Automatic Voltage Roll-Back Control And Low Voltage Cut Out	
Auto Power Control	Yes – Intelligent Multi-Channel Power Management	
"Soft Start" Electronics Protection	Yes	
Reverse Polarity Protection	Yes	
In Rush Current Protection	Yes	
Power Line Noise Suppression	Yes	
Bonding	Not Required	
Electrical Installation	Simple 2 Wire Connection	



PHYSICAL		
Beam Angle	9° - 50° Letterbox Beam (Vert - Horiz)	
Water Ingress Protection Rating	IP68	
Light Face Dimensions (LxWxH)	131.5 x 7.2 x 15.8 cm (51.8 x2.8 x 6.2 in)	
Housing Type	Powder Coated Aluminium Body with Makrolon Lens	
Light Cable Length	50cm (19.7 in)*	
Weight	6.5 Kg (14.3 Lbs)	
Mechanical Installation	Stainless Steel Fixing Brackets	

 $<sup>\</sup>hbox{\it *Extension distance depends on cable type, refer to user manual for further info}$