



# Offshore 5-LED

Powered by

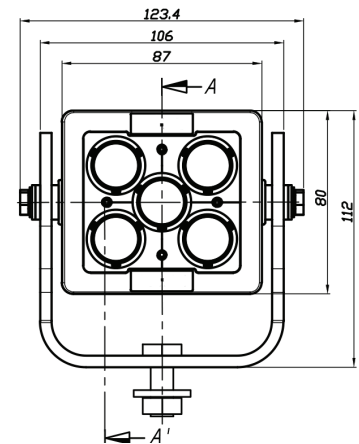

Also available in black

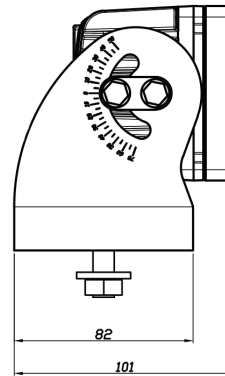

## PRODUCT DETAILS

Raw Lumens	4,400
Effective Lumens	3,305
Current Draw	2.92A/12VDC, 1.46A/24VDC
Wattage	35W
Weight	1.19kg / 2.62lb
Beam Angle Options	10°, 25°, 40°, 60°, 90°, 30x65°
Color Temperature	5,700 Kelvin
Input Voltage	11 - 65VDC
Wattage per LED	7W
IP Rating	IP68/IP69K
Vibration Dampened & Shock Proof	60 Grms
EMC/EMI Rating	CISPR 25 - Class 1
Cable Length	6' x 16awg duplex boat cable
Lens	Polycarbonate
Environmental Coating	Interpon 810
Bracket Material	304 Stainless Steel
Finish Options	White or Black
Warranty	5 Years
Safety Standards Compliance	CE, ROHS, IEC 6247



Photo Credit: Blount Boats



### NARROW FLOOD BEAM (25°)

Part No. ILBMB070525 (black), ILBMW070525 (white)



### FLOOD BEAM (40°)

Part No. ILBMB070540 (black), ILBMW070540 (white)



### WIDE FLOOD BEAM (60°)

Part No. ILBMB070560 (black), ILBMW070560 (white)



### SUPER WIDE FLOOD BEAM (90°)

Part No. ILBMB070590 (black), ILBMW070590 (white)



### ELLIPTICAL BEAM (30x65°)

Part No. ILBMB07053065 (black), ILBMW07053065 (white)

