
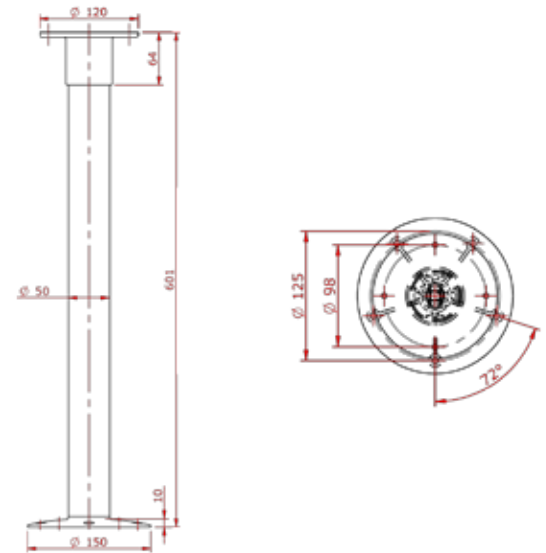


NorSap's range of table pedestals offers a broad selection for every boater's needs. Options such as a removable base and top, adjustable height, and various height offerings, provide the right product for every user. All pedestals are offered in a standard anodized aluminum or high polish finish. The removable deck mounted pedestals have a flush surface mount deck flange made of 316 SS. The BL version of the fixed base pedestals are finished off with a 316 SS cover over a cast base, again offering a nice finished look.

## NorSap Table Pedestals

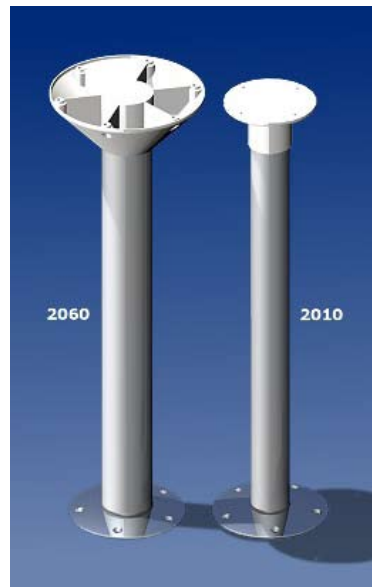


### Fixed Height, Removable Base

Height (mm)	Height (in)	Tube Diameter	Part Number	Height (mm)	Height (in)	Tube Diameter	Part Number
<b>Fixed Height, Removable Base, Anodized</b>				<b>Fixed Height, Removable Base, Polished Aluminum</b>			
285	11.2	ø50mm	NS2010-285	600	23.6	ø50mm	NS2010-600BL
330	13.0	ø50mm	NS2010-330	670	26.4	ø50mm	NS2010-670BL
600	23.6	ø50mm	NS2010-600	700	27.6	ø50mm	NS2010-700BL
650	25.6	ø50mm	NS2010-650	725	28.5	ø50mm	NS2010-725BL
700	27.6	ø50mm	NS2010-700	330	13.0	ø65mm	NS2060-330BL
725	28.5	ø50mm	NS2010-725	440	17.3	ø65mm	NS2060-440BL
800	31.5	ø50mm	NS2010-800	620	24.4	ø65mm	NS2060-620BL
900	35.4	ø50mm	NS2010-900	650	25.6	ø65mm	NS2060-650BL
330	13.0	ø65mm	NS2060-330	660	26.0	ø65mm	NS2060-660BL
590	23.2	ø65mm	NS2060-590	680	26.8	ø65mm	NS2060-680BL
610	24.0	ø65mm	NS2060-610	700	27.6	ø65mm	NS2060-700BL
650	25.6	ø65mm	NS2060-650	740	29.1	ø65mm	NS2060-740BL
680	26.8	ø65mm	NS2060-680	760	29.9	ø65mm	NS2060-760BL
700	27.6	ø65mm	NS2060-700				
710	28.0	ø65mm	NS2060-710				
760	29.9	ø65mm	NS2060-760				
860	33.9	ø65mm	NS2060-860				




MJM Yachts

### Fixed Height with Fixed Base

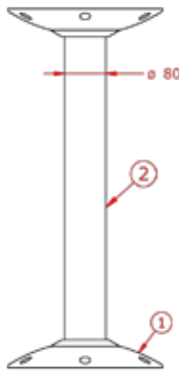


Height (mm)	(in)	Tube Diameter	Part Number
<b>Anodized with White Base</b>			
700	27.6	ø65mm	NS7025
700	27.6	ø80mm	NS7020
<b>Aluminum with Chrome Base</b>			
700	27.6	ø65mm	NS7025BL
700	27.6	ø80mm	NS7020BL

### Adjustable Height with Fixed Base

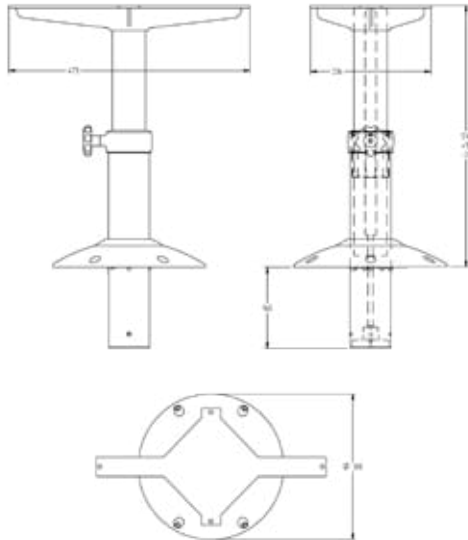

Height Range (mm)	(in)	Tube Diameter	Part Number
<b>Anodized with White Base, Spring Suspended</b>			
360-690	14.2-27.2	ø80mm	NS1600
420-680	16.5-26.8	ø80mm	NS1600UD
<b>Anodized with White Base, Gas Assisted</b>			
360-690	14.2-27.2	ø80mm	NS1610
420-680	16.5-26.8	ø80mm	NS1610UD
<b>Polished Aluminum with Chrome Base, Spring Suspended</b>			
360-690	14.2-27.2	ø80mm	NS1600BL
420-680	16.5-26.8	ø80mm	NS1600UDBL
<b>Polished Aluminum with Chrome Base, Gas Assisted</b>			
360-690	14.2-27.2	ø80mm	NS1610BL
420-680	16.5-26.8	ø80mm	NS1610UDBL

### Adjustable Height, Removable Base

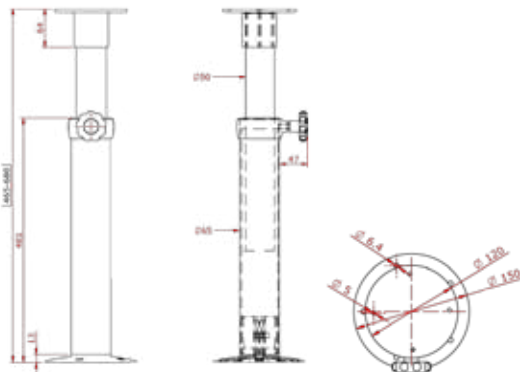

Height Range (mm)	(in)	Tube Diameter	Part Number
<b>Anodized Base</b>			
465-680	18.3-26.8	ø65mm	NS2065-465-680
<b>Polished Aluminum Base</b>			
465-680	18.3-26.8	ø65mm	NS2065-465680BL

See [www.imtra.com](http://www.imtra.com) for full range of products

