

Mounting frames - TECHNICAL CHARACTERISTICS


Technical specifications

- polycarbonate (Glow Wire 850 °C)
- dielectric strength 2000 V
- 'honeycomb' structure of stiffening


Conformity to Standards

LV Directive
EN 60669-1 Standard


Dimensions (in mm)

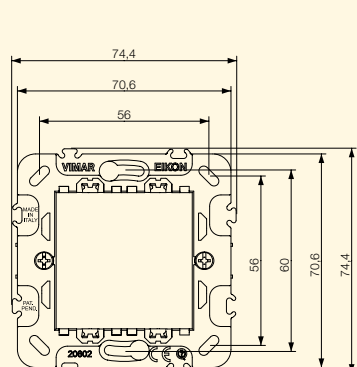


20602

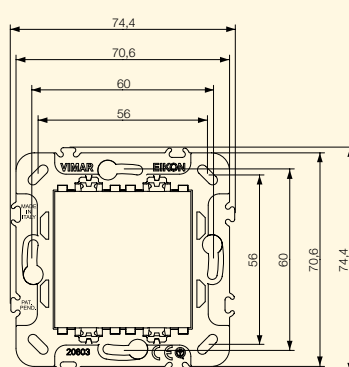


20603

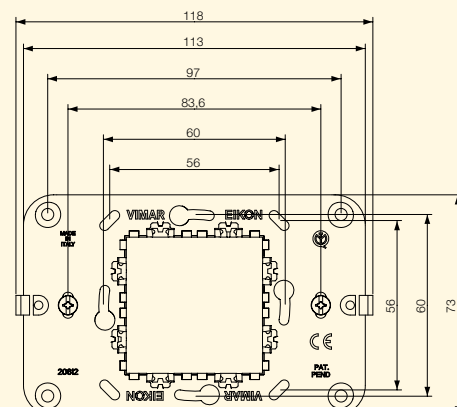


20612

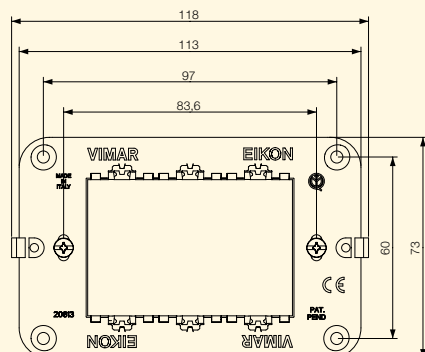

20613

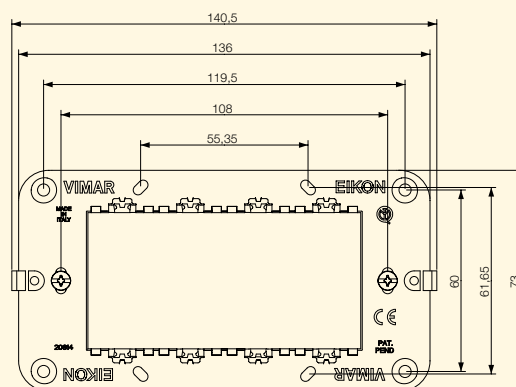

20614

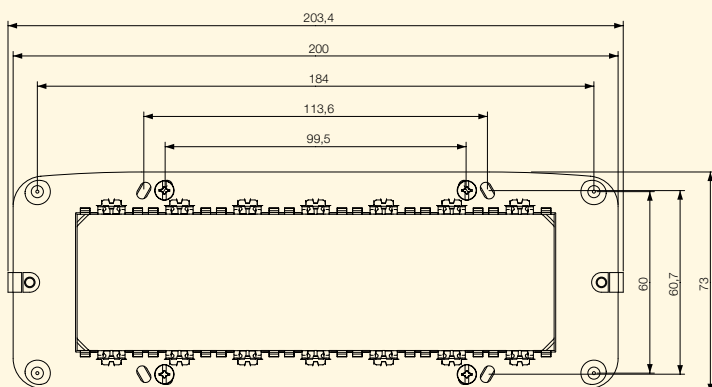

20617

Mounting frames

Mounting frames

20602	2-module mounting frame, with claws, for $\varnothing$ 60 mm mounting boxes
20603	2-module mounting frame, without screws, for 60 mm distance between centres or 56x56 mm mounting boxes, for horizontal or vertical installation
20612	2-module mounting frame, with screws, for 3-module or 60 mm distance between centres or 56x56 mm mounting boxes, for horizontal or vertical installation



20602



20603



20612

Mounting frames

20613	3-module mounting frame, with screws, for 3-module mounting boxes
20614	4-module mounting frame, with screws, for 4-module mounting boxes
20617	7-module mounting frame, with screws, for 6/7-module mounting boxes



20613




20614




20617

Mounting frames - TECHNICAL CHARACTERISTICS


Dimensions (in mm)

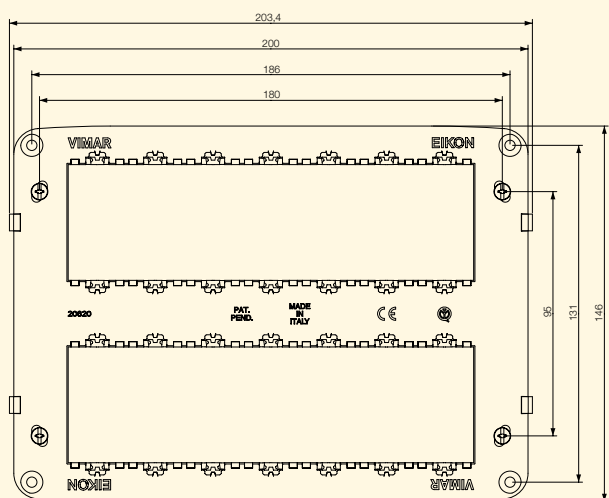


20620

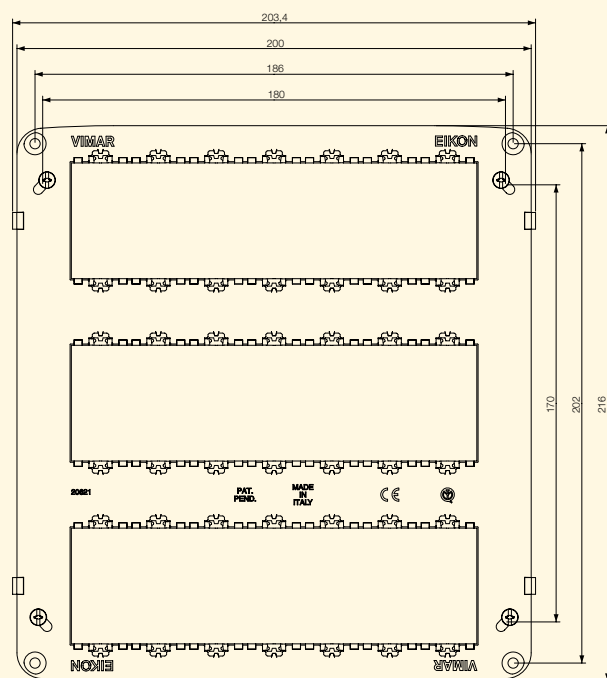


20621




20626

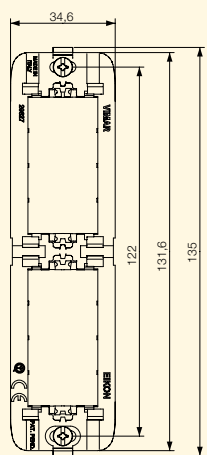

20627



20784




20787

Mounting frames

Mounting frames

20620	14-module (7+7) mounting frame, with screws, for V71320, V71620 flush or 09920... surface mounting boxes
20621	21-module (7+7+7) mounting frame, with screws, for V71321 flush or 09921... surface mounting boxes
20626	1-module, with screws, for panel mounting
20627	2-module, with screws, for panel mounting

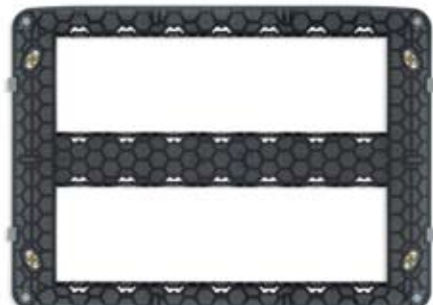

20620



20621



20626



20627

Table mounting boxes

20784	.B	.N	4-module table mounting box. To complet with 4-module cover plate
20787	.B	.N	7-module table mounting box. To complet with 7-module cover plate



20784
grey



20784.B
white



20784.N
Next



20787
grey



20787.B
white



20787.N
Next

Flush, surface and table mounting

Flush and surface mounting - ø 60 mm mounting box - 2-module

 V71001 GW 650 °C, light blue V71001.AU GW 960 °C, black  V71601 For hollow walls, with screws, GW 850 °C, light blue	 09971.A 43,5 deep, RAL 9001 ivory 09971.01: white 09971.SL: Silver	 20602 2-module, with claws. Not for V71601  20603 2-module, without screws	 20642... 2-module Classic Dimensions: 85x85 mm	 20672... 2-module Round Dimensions: 80x80 mm	 20652... 2-central-module Classic Dimensions: 120x85 mm	 20682... 2-central-module Round Dimensions: 120x80 mm
---	---	---	--	---	---	---

Flush and surface mounting - 2- and 3-module

 V71303 GW 650 °C, light blue V71303.AU GW 960 °C, black  V71613 For hollow walls GW 850 °C, light blue	 09983 35-45 mm deep, grey 09983.B: white 09983.N: Next  09975.A 43,5 mm deep, RAL 9001 ivory 09975.01: white 09975.SL: Silver  09976.04 30 mm deep, Idea white 09976.14: Idea grey	 20612 2-module, with screws  20613 3-module, with screws	 20652... 2-central-module Classic Dimensions: 120x85 mm  20653... 3-module Classic Dimensions: 120x85 mm	 20682... 2-central-module Round Dimensions: 120x80 mm  20683... 3-module Round Dimensions: 120x80 mm
---	--	---	--	--

Flush and table mounting - 4-module

 V71304 GW 650 °C, light blue V71304.AU GW 960 °C, black	 V71614 For hollow walls GW 850 °C, light blue	 20784 4-module table mounting box, grey 20784.B As above, white 20784.N As above, Next	 20614 4-module, with screws	 20654... 4-module Classic Dimensions: 202x85 mm	 20684... 4-module Round Dimensions: 202x80 mm
---	---	--	--	--	--

Flush and table mounting - 7-module

 V71306 GW 650 °C, light blue V71306.AU GW 960 °C, black	 V71616 For hollow walls GW 850 °C, light blue	 20787 7-module table mounting box, grey 20787.B As above, white 20787.N As above, Next	 20617 7-module, with screws	 20657... 7-module Classic Dimensions: 206x85 mm  20687... 7-module Round Dimensions: 210x80 mm
---	---	--	--	--

Flush, surface and panel mounting

Automation and video door entry system - flush mounting - 8-module



V71318
GW 650 °C, light blue



20550
Color display, LCD 3,5", with built-in 8-module mounting frame, grey
20550.B As above, white
20550.N As above, Next



20668...
8-module, Classic.
Finishing: Bright, Galvanic and Wood
Dimensions: 142x156 mm



20698...
8-module, Round.
Finishing: Bright, Galvanic and Wood
Dimensions: 142x151 mm

Flush and surface mounting - 14-module (7+7)



V71320
GW 650 °C, light blue



V71620
For hollow walls
GW 850 °C, light blue



09920.01, White
09920.14, Grey
09920.N, Next



20620...
14-module (7+7),
with screws



20660...
14-module (7+7), Classic, technopolymer, with signalling tags. Available colours: white (.01), silver (.13) and anthracite (.15)
Dimensions: 207x153 mm

Flush and surface mounting - 21-module (7+7+7)



V71321
GW 650 °C, light blue



09921.01, White
09921.14, Grey
09921.N, Next



20621
21-module (7+7+7),
with screws



20661...
21-module (7+7+7), Classic, technopolymer, with signalling tags. Available colours: white (.01), silver (.13) and anthracite (.15)
Dimensions: 207x223 mm

For panel mounting - 1- and 2-module



16776.AU
GW 960 °C



20626
1-module,
with screws



20666...
1-module, Classic.
Finishing: Bright.
Colours: Arctic white, Matt silver, Matt anthracite.
Dimensions: 40x80 mm



20696...
1-module, Round.
Finishing: Bright.
Colours: Arctic white, Matt silver, Matt anthracite.
Dimensions: 40x80 mm



16776.AU
x 2
GW 960 °C



20627
2-module,
with screws



20667...
2-module, Classic.
Finishing: Bright.
Colours: Arctic white, Matt silver, Matt anthracite.
Dimensions: 40x137 mm



20697...
2-module, Round.
Finishing: Bright.
Colours: Arctic white, Matt silver, Matt anthracite.
Dimensions: 40x137 mm