



LIGHTS FOR YOUR DAILY BUSINESS.

SERIES F-110

F-110.3

F-110.2

F-110.1



Waterproof cable connector



Connecting option





Cover for lightband

Technical Data

Specification	F-110.1	F-110.2	F-110.3
Voltage	12 + 24 Volt	12 + 24 Volt	12 + 24 Volt
Voltage range	11.6 - 16 V, 22 - 28 V	11.6 - 16 V, 22 - 28 V	11.6 - 16 V, 22 - 28 V
Power consumption	8 W	16 W	24 W
Luminous flux	750 Lm	1,500 Lm	2,300 Lm
Temperature range	-22° - +140° F	-22° - +140° F	-22° - +140° F
Dimension	9.92" x 4.33" x .49"	17.08" x 4.33" x .49"	24.84" x 4.33" x .49"
Weight	.81 lbs	1.433lbs	2.09 lbs
Protection class	IP67		
Light color	Cool white (5,700 K)		
Color Rendering Index	> 80		
Lifetime hours	L70		
Dimmable	No		
Housing	Aluminum anodized, PC		
Connecting Cord	Available separately in 3937 - 196.85 inch		
Features	Expandable to a light band via connector		



LIGHTS FOR YOUR DAILY BUSINESS.

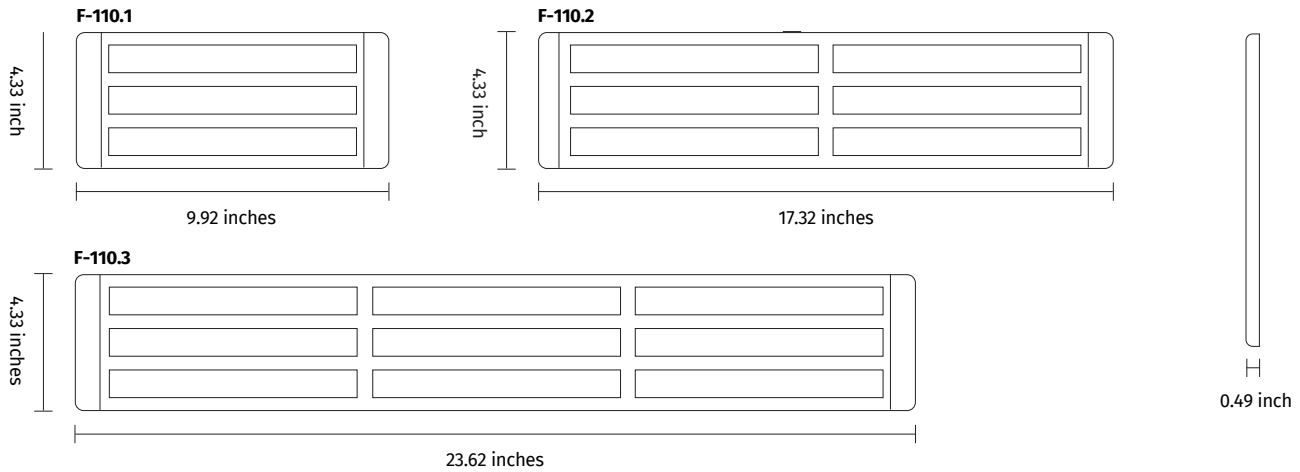


F-110.1 neutral white



Connecting cord



Lightband connector



Type		Housing Color	Order No.
F-110.1			
F-110.1 12 Volt/DC 8 W cool white IP67		aluminum/grey	IL1412
F-110.1 24 Volt/DC 8 W cool white IP67		aluminum/grey	IL1414
F-110.2			
F-110.2 12 Volt/DC 16 W cool white IP67		aluminum/grey	IL1416
F-110.2 24 Volt/DC 16 W cool white IP67		aluminum/grey	IL1418
F-110.3			
F-110.3 12 Volt/DC 24 W cool white IP67		aluminum/grey	IL1420
F-110.3 24 Volt/DC 24 W cool white IP67		aluminum/grey	IL1422

Connection cord and accessories			
F-110 Connecting cord 39.37 inches		grey	IL1326
F-110 Connecting cord 118.11 inches		grey	IL1328
F-110 Connecting cord 196.85 inches		grey	IL1330
F-110 Connector for lightband		grey	IL1344