

Exalto B.V.
Nijverheidsstraat 12, Hardinxveld-
Giessendam

How to Mount the wash nozzle and tubing.

The needed parts;
Wiper arm (2142S or B)
Washing jet (2185/2185L)
Rubber Tubing (2154.n)




1 van 6

Exalto B.V.
Nijverheidsstraat 12, Hardinxveld-
Giessendam

Insert the wash jet into the allocated desired slot of the blade clip (like below). There are 4 positions available for this, but we recommend the jet be position in front of the wiper blade from startup position so water is applied before the blade sweeps

Push it firmly until it clicks.

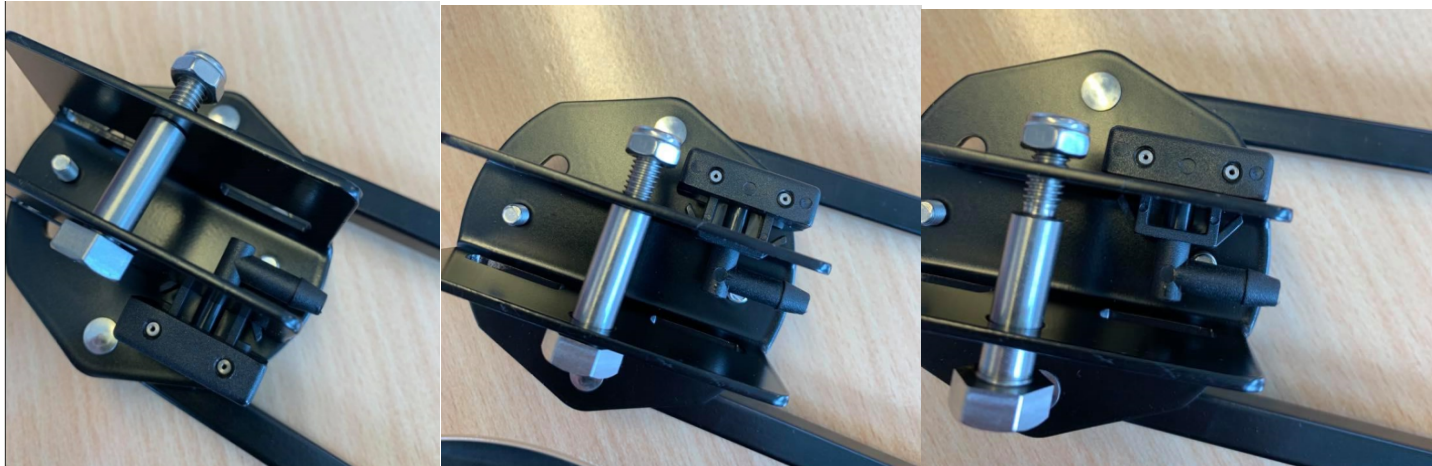

2 van 6

Exalto B.V.
Nijverheidsstraat 12, Hardinxveld-
Giessendam

Now connect the rubber tubing to the jet. This is completed by running the wash tube through the inside of the wiper arm, entry via slot and exit via the end of the box section.



3 van 6

Exalto B.V.
Nijverheidsstraat 12, Hardinxveld-
Giessendam

Now with the tube running out of boxing place under the spring assembly in the gallery and out by the spring hook.



Now assemble the arm together setting at the correct length

4 van 6

Exalto B.V.
Nijverheidsstraat 12, Hardinxveld-
Giessendam

5 van 6

info@exalto.com | www.exalto.com | T:+31 (0)184 615 800 | F:+31(0)184 614 045

Exalto B.V.
Nijverheidsstraat 12, Hardinxveld-
Giessendam

6 van 6

info@exalto.com | www.exalto.com | T: +31 (0)184 615 800 | F: +31(0)184 614 045