

BLADE



Key Features & Benefits

- Ultra-flat round stainless steel bezel design
- 2-wire power and dimming compatible with Imtra PowerLED PWM Controller
- Bi-color dimming with single momentary switch (requires a 3rd wire)
- Integrated current-controlled drive circuitry
- Convenient spring mounting (no screws)

LED Colors

Single Color: Warm, Cool, Neutral

Bi-Color: Red/Warm, Blue/Warm, Red/Cool, Blue/Cool, Red/Neutral, Blue/Neutral




Specifications

Beam angle (FWHM)	90°
Power consumption	4.7W
Luminous flux (lm)*	183
Lifetime hours (70% light output)	50,000
Halogen equivalency	25W
Input voltage	10-40VDC
Ingress protection (IP)	IP65

* Luminous flux figures are for Warm White only. For other figures please refer to our website.

Finishes

Polished stainless steel	●
Mirror-polished chrome	
Brushed stainless steel	●
Matte Chrome	
Optional custom finish (IP varies)	●

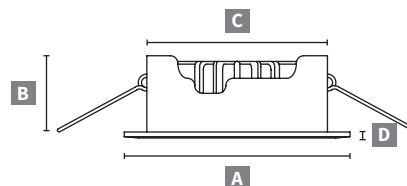

Dimensions

A	Trim Ring Width	ø3.63"	ø92mm
B	Recessed Depth	1.09"	28mm
C	Cutout	2.65"	67mm
D	Trim Ring Height	0.07"	1.8mm

