COLLECTION 2015



















COLLECTION 2015



READING LIGHT

CABIN BRASS		01.01
CABIN CHROMIUM		01.02
OCEAN		01.03
NEW CLASSIC		01.04
NEW LINE		01.05
CONCORDE		01.06
CONCORDE II		01.07
CONCORDE STAINLESS		01.08
C-LED		01.09
T-LED	NEW	01.10
MINOR		01.11
SWING		01.12
SWING STAINLESS		01.13
JAZZ		01.14
LIGHT HOUSE		01.15

CHART LIGHTS

CABIN		02,01
OCEAN		02.02
NEW LINE		02.03
NEW CLASSIC		02.04
MINOR		02.05
SWING		02.06
C-LED		02.07
T-LED	NEW	02.08
DOUB-LED		02.09

LUZ WALL + TABLE

LUZ WALL	03.01
LUZ TABLE	03.02

CEILING LAMPS

ANNE BRASS	04,01
ANNE STAINLESS	04.02
ANNE II	04.03
ANNE III	04.04
MIA BRASS	04.05
MIA STAINLESS	04.06
MIAII	04.07
MIA III	04.08

DOWN LIGHTS

CIRCLE	05.0
QUATTRO	05.02
CIRCLE	05.03
QUATTRO	05.0
QUATTRO DUE	05.03
CIRCLE II	05.00
QUATTRO II	05.0
CIRCLE II LED	05.08
QUATTRO II LED	05.09

5580 DOWN LIGHTS

5581SS		06.01
5581SS SWITCH	NEW	06.02
5581SS REWH		06.03
5581		06.04
5581 SWITCH		06.05
5581 REWH		06.06
5581-02WH	NEW	06.07
5583SS	NEW	06.08
5583SS SWITCH	NEW	06.09

5580 DOWN LIGHTS

5583		06.10
5583AL SWITCH	NEW	06.11
5586WH		06.12
55812WH	NEW	06.13
LED DIMMER	NEW	06.14
CONVERTER	NEW	06.15

IP67 DOWN LIGHTS

5660		07.01
5860		07.02
5960		07.03
6600	NEW	07.04

POWER LINE LED

08.01
NEW 08.02
08.03
08.04

COURTESY LIGHTS

1000 SERIES	09.01
1006 SERIES	09.02
1008 SERIES	09.03
1009 SERIES	09.04
1010 SERIES	09.05
1016 SERIES	09.06
1018 SERIES	09.07
1019 SERIES	09.08

COURTESY LIGHTS

1038 SERIES	09.09
1000 0211120	
1039 SERIES	09.10
1030-2 SERIES	09.11
1039-2 SERIES	09.12
1116 SERIES	09.13

MAST LED

MAST LED	10.01
SPREADER LED 6500	10.02
SPREADER LED 6600	10.03
BOOM LED 6000	10.04
BOOM LED 6100	10.05
MAST SPREADER BOOM	10.06

READING LIGHTS





CABIN BRASS

PROBABLY THE MOST BEAUTYFULL YACHT LAMP AT SEA



The Danish Frigast Cabin light gives your yacht a touch of luxury and old world charm that only meticulous and full attention to detail can convey.

Cabin small is perfect as a reading light by the berth or in the cabin in smaller yachts. For 30-50 foot yachts the Cabin medium is the better choice — whilst in larger yachts the Cabin large may be preferred.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium	Large
A	73mm/	90mm/	115mm/
	2.87in	3.54in	4.53in
В	115mm/	130mm/	172mm/
	4.53in	5,12in	6.77in
С	90mm/	90mm/	90mm/
	3.54in	3.54in	3.54in
D	110mm/	130mm/	156mm/
	4.33in	5,12in	6.14in



Model	Material	Finish	Bulb/LED	Part. No.
Cabin small	Brass	Lacquer	G4 5-10W	10H
Cabin small	Brass	Lacquer	LED 1,2W	10LED
Cabin medium	Brass	Lacquer	G4 5-10W	20H
Cabin medium	Brass	Lacquer	LED 1,2W	20LED
Cabin large	Brass	Lacquer	G4 5-20W	40H
Cabin large	Brass	Lacquer	LED 1,2W	40LED



CABIN MEDIUM BRASS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

CABIN CHROMIUM

PROBABLY THE MOST BEAUTYFULL YACHT LAMP AT SEA



The Danish Frigast Cabin light gives your yacht a touch of luxury and old world charm that only meticulous and full attention to detail can convey.

Cabin small is perfect as a reading light by the berth or in the cabin in smaller yachts. For 30-50 foot yachts the Cabin medium is the better choice — whilst in larger yachts the Cabin large may be preferred.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium	Large
A	73mm/	90mm/	115mm/
	2.87in	3.54in	4.53in
В	115mm/	130mm/	172mm/
	4.53in	5,12in	6.77in
С	90mm/	90mm/	90mm/
	3.54in	3.54in	3.54in
D	110mm/	130mm/	156mm/
	4.33in	5.12in	6.14in



Model	Material	Finish	Bulb/LED	Part. No.
Cabin small	Brass	Chromium	G4 5-10W	11 H
Cabin small	Brass	Chromium	LED 1,2W	11 LED
Cabin medium	Brass	Chromium	G4 5-10W	21H
Cabin medium	Brass	Chromium	LED 1,2W	21LED
Cabin large	Brass	Chromium	G4 5-20W	41 H
Cabin large	Brass	Chromium	LED 1,2W	41 LED



OCEAN

PROBABLY THE STRONGEST YACHT LAMP AT SEA



This maintenance free OCEAN light is made of highly finished stainless steel and fitted with a badge made of 24 carat gold plated brass. The bell swivels smoothly in all directions. The small model is perfect as a reading light by the berth or in the cabin in smaller yachts. In larger yachts the Ocean medium is the right choice.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium
A	75mm/2.96in	90mm/3.54im
В	115mm/4.53im	130mm/5,12in
С	92mm/3.62in	92mm/3,62in
D	112mm/4.45in	130mm/5,12in



Model	Material	Finish	Bulb/LED	Part. No.
Ocean medium	Stainless steel	Highly finished	G4 5-10W	60H
Ocean medium	Stainless steel	Highly finished	LED 1,2W	60LED
Ocean small	Stainless steel	Highly finished	G4 5-10W	70H
Ocean small	Stainless steel	Highly finished	LED 1.2W	70LED



OCEAN MEDIUM

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

NEW CLASSIC



New Classic is a range of lights with a soft timeless design meeting the demand for both reading and general light. The bell swivels smoothly in all directions to cast a pool of light wherever needed.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	80mm/3,15in
В	130mm/5.12in
С	92mm/3.62in
D	130mm/5,12in



Model	Material	Finish	Bulb/LED	Part. No.
New Classic	Brass	Laquer	G4 5-10W	620H
New Classic	Brass	Laquer	LED 1,2W	620LED
New Classic	Brass	Anthracite	G4 5-10W	620HAN
New Classic	Brass	Anthracite	LED 1,2W	620LEDAN
New Classic	Brass	Chromium	G4 5-10W	621H
New Classic	Brass	Chromium	LED 1.2W	621LED



NEW CLASSIC BRASS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

NEW LINE



A modem range of lights designed for use in smaller yachts or as reading light in any yacht. The bell swivels in all directions.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	72mm/2.84in
В	110mm/4.33in
С	72mm/2.84in
D	110mm/4.33in



Model	Material	Finish	Bulb/LED	Part. No.
New Line	Brass	Laquer	G4 5-10W	310H
New Line	Brass	Laquer	LED 1,2W	310LED
New Line	Stainless steel	Highly finished	G4 5-10W	311H
New Line	Stainless steel	Highly finished	LED 1,2W	311LED
New Line	Stainless steel	Brushed	G4 5-10W	311HBRU
New Line	Stainless steel	Brushed	LED 1,2W	311LEDBRU



NEW LINE STAINLESS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


CONCORDE "MARTINI GLASS"



The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	110mm/4.33in
В	140mm/5.51in
С	92mm/3.62in
D	125mm/4.93in



Model	Material	Finish	Bulb	Part. No.
Concorde Blue	Stainless steel	Highly finished	G4 10W F	920BL
Concorde Green	Stainless steel	Highly finished	G4 10W F	920GR
Concorde White	Stainless steel	Highly finished	G4 10W F	920WH
Concorde Green	Brass	Lacquer	G4 10W F	929GR
Concorde White	Brass	Lacquer	G4 10W F	929WH
Concorde Blue	Brass	Lacquer	G4 10W F	929BL



CONCORDE STAINLESS WHITE

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

CONCORDE II




01.07

The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in	
Α	110mm/4,33in	
В	140mm/5.51in	
С	72mm/3.62in	
D	125mm/4.93in	



Model	Material	Finish	Bulb	Part. No.
Concorde Blue	Stainless steel	Highly finished	G4 10W F	911BL
Concorde Green	Stainless steel	Highly finished	G4 10W F	911GR
Concorde White	Stainless steel	Highly finished	G4 10W F	911WH



CONCORDE II STAINLESS WHITE

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

CONCORDE STAINLESS



A modern range of lights designed for use in yachts. The bell swivels in all directions.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h,

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in	
Α	110mm/4.33in	
В	140mm/5.51in	
С	72mm/3.62in	
D	125mm/4.93in	



Model	Material	Finish	Bulb/LED	Part. No.
Concorde	Stainless steel	Highly finished	G4 5-10W	326H
Concorde	Stainless steel	Highly finished	1,2W LED	326LED
Concorde	Stainless steel	Brushed	G4 5-10W	326HBRU
Concorde	Stainless steel	Brushed	1,2W LED	326LEDBRU
Concorde	Stainless steel	Anthracite	G4 5-10W	326HAN
Concorde	Stainless steel	Anthracite	1,2W LED	326LEDAN



CONCORDE STAINLESS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

C-LED CABI

C-LED the revolution in Yacht lighting. Breathtaking design, function and light quality for modern Yachts.


Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver,

The lifetime of the LED is more than 50,000h.

	Dimensions mm/in	
Α	35mm/1,35in	
В	70mm/2.75in	
С	45mm/1.75in	
D	85mm/3.38in	







C-LED 1411



C-LED 1419



C-LED 1418

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

T-LED **DENMARK**


T-LED the new Nordic-Design light for modern Yachts.

The LED lights are mounted with 12 warm white LEDs which gives excellent reading light.

Light output: 100lm Power consumption: 1,2W Colour temp: 2800K CRI> 80 Lightcone>120°

Internal driver for 12V DC (11-16V)

	Dimensions mm/in
A	34mm/1.34in
В	90mm/3.54in
С	45mm/1.75in
D	90mm/3,54in

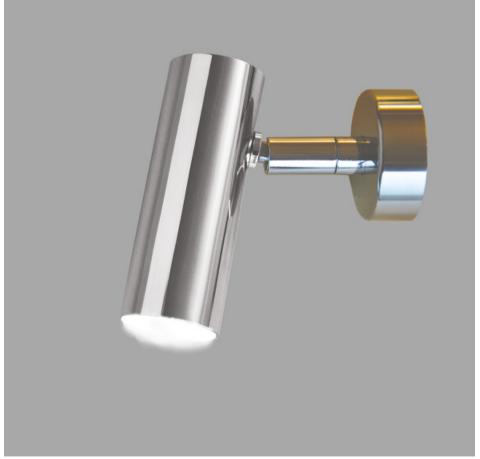

C-LED 1421

Model	Material	Finish		Part. No.
T-LED	Stainless steel	Highly finished	1,2W LED	1421


CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

MINOR

The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in	
A	70mm/2.75in	
В	110mm/4,33in	
С	72mm/2.84in	
D	110mm/4,33in	





MINOR STAINLESS WHITE

Model	Material	Finish	Bulb	Part. No.
Minor	Brass	Lacquer	G4 10W F	900WH
Minor	Stainless steel	Highly finished	G4 10W F	901WH

WIINOKSTAINLESS WITTE

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


SWING

CABIN

A modern soft-line range of lights designed for use in smaller yachts or as reading light in any yacht. The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in	
Α	70mm/2.75in	
В	110mm/4.33in	
С	72mm/2.84in	
D	110mm/4.33in	





Model	Material	Finish	Bulb	Part. No.
Swing	Brass	Lacquer	G4 10W F	940WH
Swing	Stainless steel	Highly finished	G4 10W F	941WH

SWING STAINLESS WHITE

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

SWING STAINLESS



A modern soft-line range of lights designed for use in smaller yachts or as reading light in any yacht. The bell swivels in all directions.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in	
Α	70mm/2.75in	
В	110mm/4.33im	
С	72mm/2.84in	
D	110mm/4.33in	





SWING STAINLESS

Model	Material	Finish	Bulb/LED	Part. No.
Swing	Stainless steel	Highly finished	G4 5-10W	341H
Swing	Stainless steel	Highly finished	LED 1,2W	341LED

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

JAZZ


CABII


DENMARK

A modern soft-line range of lights designed for larger yachts. The design and transparent colours of the glass shades accommodate with all types of interior designs. The shade swivels in all directions,

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	110mm/4.33in
В	125mm/4.93in
С	92mm/3.62in
D	160mm/6.30in







JAZZ STAINLESS WHITE

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015 01.14


LIGHT HOUSE



Erik Magnussen designed wall light. Integrated switch - the light goes on when the light is "opened". Can be turned in all directions.

A Danish design award winner.

mm	in
90	3.54
50	2.00
110	4.33
	90 50

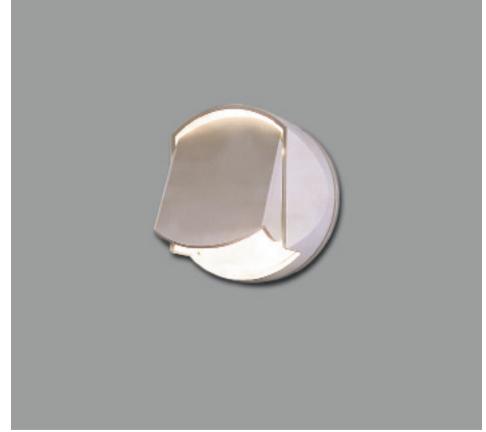

LIGHT HOUSE

ModelMaterialBulbPart. No.Light-HousePolycarbonateG4 5-10WLH201WH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

CHART TABLE LIGHTS





CABIN CHART



The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give lights exactly where it is needed.

Save 80%-90% energy!

The LED lights are mounted with one warm white Power LED which gives excellent reading light.


LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium
Α	75mm/2.96in	90mm/3.54im
В	115mm/4.53im	130mm/5.12in
С	92mm/3.62in	92mm/3,62in
D	112mm/4.45in	130mm/5.12in

Flex arm 400mm/15,75in



Model	Material	Finish	Bulb/LED	Part. No.
Cabin chart small	Brass	Lacquer	G4 5-10W	30H
Cabin chart small	Brass	Lacquer	LED 1,2W	30LED
Cabin chart small	Brass	Chromium	G4 5-10W	31H
Cabin chart small	Brass	Chromium	LED 1,2W	31LED
Cabin chart medium	Brass	Lacquer	G4 5-10W	50H
Cabin chart medium	Brass	Lacquer	LED 1,2W	50LED
Cabin chart medium	Brass	Chromium	G4 5-10W	51H
Cabin chart medium	Brass	Chromium	LED 1.2W	51LED



CABIN CHART MEDIUM BRASS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

OCEAN CHART



The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give lights exactly where it is needed,

Save 80%-90% energy!

The LED version is mounted with one warm white Power LED which gives excellent light to read,


All LED lights are mounted with multivoltage 10V-30V LED driver.


Lifetime of LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Small	Medium
A	75mm/2,96in	90mm/3.54im
В	115mm/4.53im	130mm/5.12in
С	92mm/3.62in	92mm/3.62in
D	112mm/4.45in	130mm/5.12in

Flex arm 400mm/15.75in



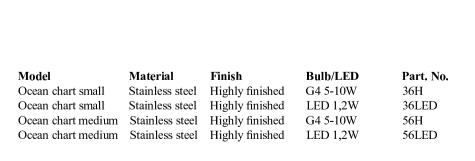



OCEAN CHART SMALL

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

NEW LINE CHART



The New Line chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in		
Α	72mm/2.84in		
С	72mm/2,84in		
	Flex arm 400mm/15.75in		



Model	Material	Finish	Bulb/LED	Part. No.
New Line chart	Brass	Lacquer	G4 5-10W	330H
New Line chart	Brass	Lacquer	1,2W LED	330LED
New Line chart	Stainless steel	Highly finished	G4 5-10W	331H
New Line chart	Stainless steel	Highly finished	1,2W LED	331LED
New Line chart	Stainless steel	Brushed	G4 5-10W	331HBRU
New Line chart	Stainless steel	Brushed	1.2W LED	331LEDBRU



NEW LINE CHART BRASS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

NEW CLASSIC CHART



The New Classic chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

Save 80%-90% energy!


The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in		
Α	80mm/3.15in		
С	92mm/6.62in		
	Flex arm 400mm/15.75in		



Model	Material	Finish	Bulb/LED	Part, No.
New Classic chart	Brass	Lacquer	G4 5-10W	650H
New Classic chart	Brass	Lacquer	LED 1,2W	650LED
New Classic chart	Brass	Anthracite	G4 5-10W	650HAN
New Classic chart	Brass	Anthracite	LED 1,2W	650LEDAN
New Classic chart	Brass	Chromium	G4 5-10W	651H
New Classic chart	Brass	Chromium	LED 1.2W	651LED



NEW CLASSIC CHART CHROMIUM

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


MINOR CHART



The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed.

The lights are used with low consumption 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	70mm/2.75in
С	72mm/2.84in
	Flex arm 400mm/15.75in





MINOR CHART BRASS WHITE

Model	Material	Finish	Bulb	Part. No.
Minor chart	Brass	Lacquer	G4 10W F	930WH
Minor chart	Stainless steel	Highly finished	G4 10W F	931WH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


SWING CHART



The chart table version makes lighting more flexible - not only for chart reading, but also as normal reading light. The bell orients in all directions to give light exactly where it is needed,

The lights are used with low consumption 12V or 24V G4 halogen bulb.

	Dimensions mm/in		
Α	70mm/2.75in		
С	72mm/2,84in		
	Flex arm 400mm/15.75in		





SWING CHART BRASS WHITE

Model	Material	Finish	Bulb	Part. No.
Swing chart	Brass	Lacquer	G4 10W F	960WH
Swing chart	Stainless steel	Highly finished	G4 10W F	961WH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

C-LED FLEX



C-LED the revolution in Yacht lighting. Breathtaking design, function and light quality for modern Yachts.


Save 80%-90% energy!

The LED lights are mounted with one warm white Power LED which gives excellent reading light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED is more than 50,000h.

	Dimensions mm/in
Α	35mm/1.35in
С	45mm/1.75in
	Flex arm 250mm/9,85in



Model	Material	Finish	LED	Part. No.
C-LED FLEX	Stainless steel	Highly finished	1,2W LED	1431
C-LED FLEX	Aluminum	Black	1,2W LED	1438
C-LED FLEX	Aluminum	Titan	1,2W LED	1439



C-LED FLEX ALUMINUM TITAN

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

T-LED FLEX



T-LED the new Nordic-Design light for modern Yachts.

The LED lights are mounted with 12 warm white LEDs which gives excellent reading light.

Light output: 100lm Power consumption: 1,2W Colour temp: 2800K

CRI> 80 Lightcone>120°

Internal driver for 12V DC (11-16V)

	Dimensions mm/in
A	34mm/1.35in
С	45mm/1.75in
	Flex arm 250mm/9,85in
	or

Flex arm 350mm/9,85in

Model	Material	Finish	LED	Part. No.
T-LED FLEX	Stainless steel, 250mm flexarm	Highly finished	1,2W LED	1451
T-LED FLEX	Stainless steel, 350mm flexarm	Highly finished	1,2W LED	1451T



T-LED FLEX 1451T

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOUB-LED TWO COLOURED LED CHART TABLE LIGHT



DOUB-LED is a new chart table light with warm white reading light and red night light. For table mounting.

Mounted with a tree direction switch.

Left: white, right: red, middle: off

Life time of LED >50,000h Power consumption 1.5W white, 0.5W red.


Dimensions

Head/tube L 125mm


Diameter 22mm

Base Diameter 51mm Flex-arm L 350mm

Model	Material	Finish	LED	Part. No.
DOUB-LED Table	Stainless steel	Highly finished	12 + 8 LED	1441T REWH 12V
DOUB-LED Table	Stainless steel	Highly finished	12 + 8 LED	1441T REWH 24V

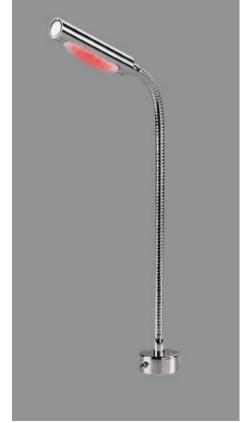




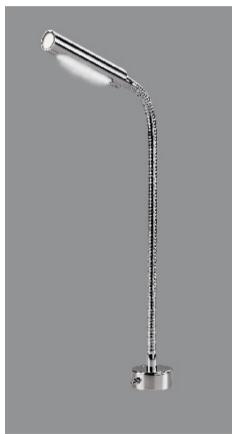

DOUB-LED TABLE MOUNTED

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

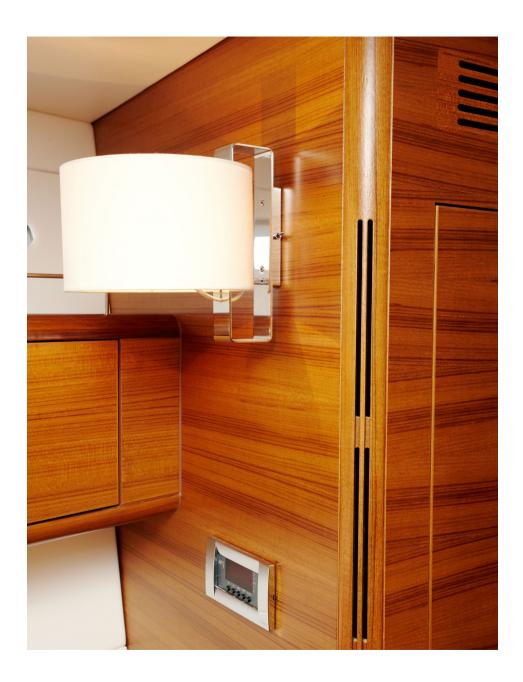




X-YACHTS OF DENMARK LUZ WALL LAMP IN OWNERS CABIN X-65 LUZ WALL

CABIN

The exclusive design makes Luz fit into modern interiors.

The curved shade gives a soft light, and can be placed wherever you want to play with light. The smoothness of the light contributes to a harmonic environment and makes you feel at home.

	Dimensions mm/in
Α	190mm/7,50in
В	240mm/9.50in
С	230mm/9.10in
D	130mm/5.12in





LUZ WALL LAMP

ModelMaterialFinishBulbPart. No.Luz WallStainless steelHighly finishedG4 max. 20W2011WH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


LUZ TABLE




The exclusive design makes Luz fit into modern interiors.

The curved shade gives a soft light, and can be placed wherever you want to play with light. The smoothness of the light contributes to a harmonic environment and makes you feel at home.

	Dimensions mm/in		
Α	200mm/7,90in		
В	450mm/17.75in		
С	40mm/1.57in		
D	150mm/2.17in		







LUZ TABLE LAMP

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

CEILING LIGHTS





ANNE

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in	
Α	165mm/6,50in	
В	45mm/1.77in	



Model	Material	Finish	Bulb/LED	Part. No.
ANNE	Brass	Lacquer	G4 10W F	160H
ANNE	Brass	Lacquer	G4 10W F	160HS
ANNE	Brass	Lacquer	3x1,2W LED	160LED
ANNE	Brass	Lacquer	3x1,2W LED	160LEDS
ANNE	Brass	Lacquer	3x1,2W LED	160LEDS 2B
	S=SWITCH	2B = WHITE	POWER LED + RED	NIGHTLIGHT



04.01

ANNE BRASS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

ANNE

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	165mm/6,50in
В	45mm/1.77in



Model	Material	Finish	Bulb/LED	Part. No.
ANNE	Stainless steel	Highly finished	G4 10W F	161H
ANNE	Stainless steel	Highly finished	G4 10W F	161HS
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LED
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LEDS
ANNE	Stainless steel	Highly finished	3x1,2W LED	161LEDS 2B
	S=SWITCH	2B = WHITE PO	WER LED + RED	NIGHTLIGHT



ANNE STAINLESS STEEL

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015 04.02

ANNE II

CABII


DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne II is the perfect choice for smaller and medium yachts.

The lights are used with low consumption 12V or 24V G4 halogen bulb

	Dimensions mm/in
A	155mm/6.30in
В	32mm/1,26in
С	25mm/0.98in
D	125mm/4.92in





ANNE II BRASS

Model	Material	Finish	Bulb	Part. No.
ANNE II	Brass	Laquer	G4 10W F	150H
ANNE II	Stainless steel	Highly finished	G4 10W F	156H

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

ANNE III

CABII

DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Anne III is the perfect choice for smaller and medium yachts.


Save 70% energy!

50.000h.

The LED lights are mounted with three warm white Power LED's which give excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.
The lifetime of the LED's is more than

	Dimensions mm/in
A	155mm/6,30in
В	32mm/1,26in



|--|

ANNE III BRASS

Model	Material	Finish	LED	Part. No.
ANNE III	Brass	Laquer	3x1,2W LED	140LED
ANNE III	Stainless steel	Highly finished	3x1.2W LED	146LED

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

MIA CABII

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	200mm/7.88in
В	55mm/2.17in



Model	Material	Finish	Bulb/LED	Part. No.
MIA	Brass	Lacquer	G4 10-20W	200H
MIA	Brass	Lacquer	G4 10-20W	200HS
MIA	Brass	Lacquer	3x1,2W LED	200LED
MIA	Brass	Lacquer	3x1,2W LED	200LEDS
MIA	Brass	Lacquer	3x1,2W LED	200LEDS 2B
	S=SWITCH	2B = WHITE POWER LED + RED LED		



04.05

MIA BRASS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

MIA CABII

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia is the perfect choice for smaller and medium yachts.

The lights are available with or without switch. Also available with additional nightlight from 8 red LED's.

Save 70% energy!


The LED lights are mounted with three warm white Power LED's which gives excellent light.

LED lights are mounted with a multivoltage 10V-30V LED driver.

The lifetime of the LED's is more than 50.000h.

The lights are also available for 12V or 24V G4 halogen bulbs.

	Dimensions mm/in
Α	200mm/7.88in
В	55mm/2.17in



Model	Material	Finish	Bulb/LED	Part. No.
MIA	Stainless steel	Highly finished	G4 10-20W F	201H
MIA	Stainless steel	Highly finished	G4 10-20W F	201HS
MIA	Stainless steel	Highly finished	3x1,2W LED	201LED
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS
MIA	Stainless steel	Highly finished	3x1,2W LED	201LEDS 2B
	S=SWITCH	2B = WHITE PO	WER LED + RED	LED



04.06

MIA STAINLESS STEEL

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

MIA II

CABII


DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia II is the perfect choice for medium and larger yachts.

The lights are used with low consumption 12V or 24V G4 halogen bulb

	Dimensions mm/in
Α	195mm/7.68in
В	32mm/1.26in
С	25mm/0.98in
D	160mm/6.30in





MIA II BRASS

Model	Material	Finish	Bulb	Part. No.
MIA II	Brass	Laquer	G4 10-20W	190H
MIA II	Stainless steel	Highly finished	G4 10-20W	191H

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

MIA III

CABII

DENMARK

These surface mounted ceiling lights complete the Cabin and Ocean range. The lights are designed to give an optimum of soft light.

The Cabin Mia III is the perfect choice for medium and larger yachts.


Save 70% energy!

The LED version is mounted with three similar to warm white Power LED which gives excellent light.

All LED lights are mounted with multivoltage 10V-30V LED driver.

Lifetime of LED is more than 50.000h.

	Dimensions mm/in
A	195mm/7.68in
В	32mm/1,26in





MIA III BRASS

Model	Material	Finish	LED	Part. No.
MIA III	Brass	Laquer	3x1,2W LED	180LED
MIA III	Stainless steel	Highly finished	3x1.2W LED	181LED

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWN LIGHTS HALOGEN - LED







DOWNLIGHT CIRCLE

FIXED LIGHT HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	60mm/2.37in
В	15mm/0.59in
С	40mm/1.58in
D	40mm/1,58in





DOWNLIGHT CIRCLE FIXED

Model	Material	Finish	Bulb	Part. No.
CIRCLE	Stainless steel	Highly finished	GU4 10W	540-03
CIRCLE	Stainless steel	Brushed	GU4 10W	540-03BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT QUATTRO

FIXED LIGHT HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	57,5x57,5mm/2.27x2.27in
В	15mm/0.59in
С	40mm/1.58in
D	40mm/1,58in





DOWNLIGHT QUATTRO FIXED

Model	Material	Finish	Bulb	Part. No.
QUATTRO	Stainless steel	Highly finished	GU4 10W	541-03
OUATTRO	Stainless steel	Brushed	GU4 10W	541-03BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT CIRCLE HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gab between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	75mm/2.95in
В	15mm/0.59in
С	40mm/1.58in
D	55mm/2.17in





DOWNLIGHT CIRCLE BRUSHED

Model	Material	Finish	Bulb	Part. No.
CIRCLE	Stainless steel	Highly finished	GU4 20W	540-11
CIRCLE	Stainless steel	Brushed	GU4 20W	540-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT QUATTRO HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gab between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	75x75mm/2.95x2.95in
В	15mm/0,59in
С	40mm/1.58in
D	55mm/2.17in





DOWNLIGHT QUATTRO BRUSHED

Model	Material	Finish	Bulb	Part. No.
QUATTRO	Stainless steel	Highly finished	GU4 20W	541-11
OUATTRO	Stainless steel	Brushed	GU4 20W	541-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT QUATTRO DUE HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gab between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	140x75mm/5.51x2.95in
В	15mm/0.59in
С	40mm/1.58in
D	55mm/2.17in



	6	4	

DOWNLIGHT QUATTRO II BRUSHED

Model	Material	Finish	Bulb	Part. No.
QUATTRO DUE	Stainless steel	Highly finished	GU4 20W	542-11
OUATTRO DUE	Stainless steel	Brushed	GU4 20W	542-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT CIRCLE II HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gab between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	75mm/2.95in
В	2mm/0.078in
С	52mm/2.05in
D	55mm/2.17in





DOWNLIGHT QUATTRO II

Model	Material	Finish	Bulb	Part. No.
CIRCLE II	Stainless steel	Highly finished	GU4 20W	550-11
CIRCLE II	Stainless steel	Brushed	GU4 20W	550-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT QUATTRO II HALOGEN




Recessed tiltable downlight made of stainless steel. Unique construction with 2mm stainless steel house and lamp holder. Air-gab between house and lamp holder reduces temperature in the ceiling by more than 30°.

The bulb is fixed with an o-ring for easy bulb replaced from below – it is not necessary to remove the fixture from the ceiling.

Used with low consumption 12V or 24V GU4/MR11 35mm reflector bulb which deliver 30-100% more light than fixtures with G4 bulbs.

	Dimensions mm/in
Α	75x75mm/2.95x2.95in
В	2mm/0.078in
С	52mm/2.05in
D	55mm/2.17in



1			T		
	6				
		9			
	-			-	

DOWNLIGHT QUATTRO II

Model	Material	Finish	Bulb	Part. No.
Quattro II	Stainless steel	Highly finished	GU4 20W	551-11
Quattro II	Stainless steel	Brushed	GU4 20W	551-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT CIRCLE II LED



Recessed tiltable LED downlight. Unique construction with 2mm stainless steel house and black aluminum lamp holder.

Save energy with LED downlight! The warm white power LED's give excellent light with a minimum of power consumption.


LED: 3

Power consumption: 3,6W Colour temperature: 3000k

CRI >85 Lightcone: 25° On request:16°, 40° Lifetime >40,000h Fixing: 2 springs

For use with 350mA LED driver, Driver to be ordered separately.

	Dimensions mm/in
A	75mm/2.95in
В	2mm/0.078im
С	34mm/1.34in
D	55mm/2.17in



DOWNLIGHT CIRCLE II LED

Model	Material	Finish	LED	Part. No.
CIRCLE II LED	Stainless steel	Highly finished	3x1,2W LED	5500-11
CIRCLE II LED	Stainless steel	Brushed	3x1,2W LED	5500-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT QUATTRO II LED



Recessed tiltable LED downlight. Unique construction with 2mm stainless steel house and black aluminum lamp holder.

Save energy with LED downlight! The warm white power LED's give excellent light with a minimum of power consumption.


LED: 3

Power consumption: 3,6W Colour temperature: 3000k

CRI >85 Lightcone: 25° On request:16°, 40° Lifetime >40,000h Fixing: 2 springs

For use with 350mA LED driver, Driver to be ordered separately.

	Dimensions mm/in
A	75x75mm/2.95x2.95in
В	2mm/0.078im
С	34mm/1.34in
D	55mm/2.17in



DOWNLIGHT QUATTRO II LED

Model	Material	Finish	LED	Part. No.
Quattro II LED	Stainless steel	Highly finished	3x1,2W LED	5510-11
Quattro II LED	Stainless steel	Brushed	3x1,2W LED	5510-11BRU

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015



CABIN DENMARK

X-YACHTS OF DENMARK LED DOWNLIGHT 5510-11 IN X-65

LED DOWN LIGHTS 5580 SERIES





DOWNLIGHT 5581SS LED



The ultimate LED downlight for small and medium yachts.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18

Light output: 170lm Power consumption: 2W Colour temp: 3000K

CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs

IP65

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

	Dimensions mm/in
Α	70mm/2.75in
В	2mm/0.078in
С	18mm/0.70in
D	55mm/2.17in



Model	Material	Finish	LED	Part. No.
5581SS	Stainless/alu.	Highly finished	18x0,1W LED	5581SS
5581SS	Stainless/alu,	Highly finished	18x0,1W LED	5581SS 24V



DOWNLIGHT 5581SS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5581SS SWITCH



The ultimate LED downlight for small and medium yachts.

- -With internal touch switch
- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18

Light output: 170lm Power consumption: 2W Colour temp: 3000K

CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs


IP44


Model

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

Material

	Dimensions mm/in		
Α	70mm/2.75in		
В	2mm/0.078in		
С	21mm/0.83in		
D	55mm/2.17in		







DOWNLIGHT 5581SSS

5581SSS Stainless/alu. Highly finished 18x0,1W LED 5581SSS 5581SSS 24V Stainless/alu. Highly finished 18x0,1W LED 5581SSS 24V

Finish

DO WILDON

LED

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5581SS REWH LED WITH NIGHT LIGHT



The ultimate LED downlight for small and medium yachts.

- -With night light function
- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8

Light output: 170lm

Power consumption: 2W white, 0,5W red

Colour temp: 3000K

CRI> 80


Lightcone>120° Lifetime>40.000h

Fixing: 2 springs

IP65

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

	Dimensions mm/in		
Α	70mm/2.75in		
В	2mm/0.078in		
С	18mm/0.70in		
D	55mm/2.17in		



Model	Material	Finish	LED	Part. No.
5581SS REWH	Stainless/alu.	Highly finished	18+8x0,1W LED	5581SS REWH
5581SS REWH	Stainless/alu.	Highly finished	18+8x0,1W LED	5581SS REWH 24V



DOWNLIGHT 5581SS REWH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5581 LED



The ultimate LED downlight for small and medium yachts.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18

Light output: 170lm Power consumption: 2W Colour temp: 3000K

CRI> 80

Lightcone>120° Lifetime>40,000h Fixing: 2 springs

IP65

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

Model	Material	Finish	LED	Part. No.
5581AL	Aluminium	Titan	18x0,1W LED	5581AL
5581AL 24V	Aluminium	Titan	18x0,1W LED	5581 AL 24V
5581BLACK	Aluminium	Black	18x0,1W LED	5581BLACK
5581BLACK 24V	Aluminium	Black	18x0,1W LED	5581BLACK24V
5581WH	Aluminium	White	18x0,1W LED	5581WH
5581WH 24V	Aluminium	White	18x0,1W LED	5581WH 24V

	Dimensions mm/in
A	70mm/2,75in
В	2mm/0,078in
C	18mm/0,70in
D	55mm/2,17in









DOWNLIGHT 5581AL



DOWNLIGHT 5581 WH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5581 SWITCH



The ultimate LED downlight for small and medium yachts.

- -With internal touch switch
- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18

Light output: 170lm Power consumption: 2W Colour temp: 3000K


CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs

IP44

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

	Dimensions mm/in
Α	70mm/2.75in
В	2mm/0.078in
С	21mm/0.83in
D	55mm/2.17in



Model	Material	Finish	LED	Part. No.
5581ALS	Aluminium	Titan	18x0,1W LED	5581 ALS
5581WHS	Aluminium	White	18x0,1W LED	5581WHS
5581WHS 24V	Aluminium	White	18x0,1W LED	5581WHS 24V



DOWNLIGHT 5581WHS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5581 REWH LED WITH NIGHT LIGHT



The ultimate LED downlight for small and medium yachts.

- -With night light function
- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions

Also ideal for replacement of halogen downlights with 55mm cut-out.

LED: 18+8

Light output: 170lm

Power consumption: 2W white, 0,5W red

Colour temp: 3000K

CRI> 80

Lightcone>120° Lifetime>40.000h


Fixing: 2 springs

IP65


Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

Model	Material	Finish
5581 REWH	Aluminium	Titan
5581 REWH	Aluminium	Titan
5581 REWH	Aluminium	Black
5581 REWH	Aluminium	Black
5581 REWH	Aluminium	White
5581 REWH	Aluminium	White

	Dimensions mm/in
Α	70mm/2.75in
В	2mm/0.078in
С	18mm/0,70in
D	55mm/2.17in



LED	Part. No.
18+8x0,1W LED	5581 AL REWH
18+8x0,1W LED	5581 AL REWH 24V
18+8x0,1W LED	5581BLACK REWH
18+8x0,1W LED	5581BLACK REWH 24V
18+8x0,1W LED	5581WH REWH
18+8x0 1W LFD	5581WH REWH 24V

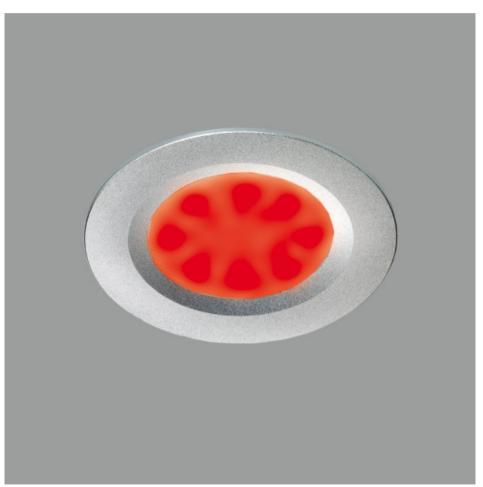

DOWNLIGHT 5581AL REWH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5581-02 LED



Surfacemounted LED downlight.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

LED: 18

Light output: 170lm Power consumption: 2W Colour temp: 3000K

CRI> 80

Lightcone>120° Lifetime>40,000h Fixing: 2 springs

IP44

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	70mm/2.75in
В	14/0,59in

⊤ B ⊥			
	⊢	A	\dashv

V	
	DOWNI I



DOWNLIGHT 5581-02WH

 Model
 Material
 Finish
 LED
 Part. No.

 5581-02WH
 Aluminium
 White
 18x0,1W LED
 5581-02WH

 5581-02WH 24V
 Aluminium
 White
 18x0,1W LED
 5581-02WH 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5583SS



06.08

The ultimate LED downlight for larger yachts.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

LED: 30

Light output: 260lm Power consumption: 3W Colour temp: 3000k

CRI> 80

Lightcone>120° Lifetime>40,000h Fixing: 2 springs

IP44

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

	Dimensions mm/in
Α	86mm/3.39in
В	2,5mm/0.1in
С	21mm/0.83in
D	75mm/2.92in



Model	Material	Finish	LED	Part. No.
5583SS	Stainless/alu.	Highly finished	30x0,1W LED	5583SS
5583SS 24V	Stainless/alu.	Highly finished	30x0,1W LED	5583SS 24V



DOWNLIGHT 5583SS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5583 SWITCH

LED WITH SWITCH



The ultimate LED downlight for larger yachts.

- -With internal touch switch
- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

LED: 30

Light output: 260lm Power consumption: 3W Colour temp: 3000k


CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs

IP44

Internal driver for 12V DC (11-16V)

	Dimensions mm/in
Α	86mm/3,39in
В	2,5mm/0.1in
С	21mm/0.83in
D	75mm/2.92in



Model	Material	Finish	LED	Part. No.	
5583SSS	Stainless/alu	Highly finished	30x0.1W LED	5583888	



DOWNLIGHT 5583SSS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5583



The ultimate LED downlight for larger yachts.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

LED: 30

Light output: 260lm Power consumption: 3W Colour temp: 3000k


CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs

IP44

Internal driver for 12V DC (11-16V) Internal driver for 24V DC (23-29V)

	Dimensions mm/in
Α	86mm/3.39in
В	2,5mm/0.1in
С	21mm/0.83in
D	75mm/2.92in



Model	Material	Finish	LED	Part. No.
5583AL	Aluminium	Titan	30x0,1W LED	5583AL
5583WH	Aluminium	White	30x0,1W LED	5583WH
5583AL 24V	Aluminium	Titan	30x0,1W LED	5583AL 24V
5583WH 24V	Aluminium	White	30x0,1W LED	5583WH 24V



DOWNLIGHT 5583WH

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5583 SWITCH LED WITH SWITCH



The ultimate LED downlight for larger yachts.

- -With internal touch switch
- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions

LED: 30

Light output: 260lm Power consumption: 3W Colour temp: 3000k

CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs

IP44

Internal driver for 12V DC (11-16V)

	Dimensions mm/in
Α	86mm/3,39in
В	2,5mm/0.1in
С	21mm/0.83in
D	75mm/2.92in





DOWNLIGHT 5583ALS

Model	Material	Finish	LED	Part. No
5583 ALS	Aluminium	Titan	30x0.1W LED	5583ALS

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5586WH LED



The ultimate LED downlight for larger yachts and ships.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Small dimensions
- -Dimmable with PWM dimmer

LED: 60

Light output: 520lm Power consumption: 6W Colour temp: 3000k


CRI> 80

Lightcone>120° Lifetime>40.000h Fixing: 2 springs

IP44

Internal driver for 24V DC (23-29V)

	Dimensions mm/in
A	100mm/3.98in
В	2,5mm/0.1in
С	52mm/2.05in
D	90mm/3,54in





DOWNLIGHT 5586WH

Model	Material	Finish	LED	Part. No.
5586	Aluminium	White	60x0,1W LED	5586WH 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2016

DOWNLIGHT 55812WH LED



The ultimate LED downlight for larger yachts and ships.

- -Excellent warm white light
- -Low power consumption
- -Low heat
- -Long life
- -Dimmable with PWM dimmer

LED: 120

Light output: 1050lm Power consumption: 12W Colour temp: 3000k


CRI> 80

Lightcone>130° Lifetime>40,000h Fixing: 2 springs

IP44

Internal driver for 24V DC (23-29V)

	Dimensions mm/in
Α	114mm/4.49in
В	2,5mm/0.1in
С	64mm/2,52in
D	104mm/4.09in





DOWNLIGHT 55812WH

Model	Material	Finish	LED	Part. No.
55812	Aluminium	White	120x0,1W LED	55812WH 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DIMMING LED LIGHTS



CABIN LED lights are dimmable. CABIN LED lights designed for a specific voltage range can be dimmed. ea. light series 5581 - 5583 - 5586 - 5589 - 55812.

A PWM LED dimmer must be connected between the power supply and the LED light(s). A push switch, a pot meter or a DALI controle enable you to dim the light to the level you want.



C-LED DIM 21398





C1 DIM 20180

OT DIM

MODEL	CONTROL	V	\mathbf{A}	Part. No.
C-LED DIM	PUSH	12V-24V	2	21398
C1 DIM	PUSH	12V-24V	8	20180
OT DIM	1-10V	12V-24V	5	OT DIM
OTI DALI DIM	DALI	12V-24V	5	OTI DALI DIM

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

CABIN LED LIGHTS IN 230V AC SYSTEMS



All CABIN lights are designed for 12VDC or 24VDC power supply which is the standard supply voltage for modern LED lights.

In 230V AC systems you need to install AC/DC converters to supply the lights.






OT20/220-24O/24

OT75/220-240/24

OT30/220-24O/24P



Part. No.
OT20/220-240/24
OT30/220-240/12P
OT30/220-240/24P
OT75/220-240/24
OTIDALI75/220-240/24





CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

IP 67 DOWN LIGHTS





DOWNLIGHT 5660 LED IP67



IP67 downlight for outdoor use. Made of turned stainless steel AISI 316.

LED: 3

Power consumption: 3,6W Colour temperature: 2700k


CRI >85

Other colour temperatur on request.

Lightcone: 36° Lifetime >50,000h Fixing: 2 springs

For use with 350mA LED driver. Driver to be ordered separately.

	Dimensions mm/in
A	65mm/2.56in
В	3mm/0.14in
С	30mm/1.18in
D	45mm/1,73in





DOWNLIGHT 5660

ModelMaterialFinishLEDPart. No.5660Stainless AISI 316Highly finished3x1,2W LED5660

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5860 LED IP67



IP67 downlight for outdoor use. Made of turned stainless steel AISI 316.

LED: 3

Power consumption: 3,6W Colour temperature: 3000k


CRI >85

Other colour temperatur on request.

Lightcone: 25°
16°, 40° on request.
Lifetime >40.000h
Fixing: 4 screws

For use with 350mA LED driver. Driver to be ordered separately.

	Dimensions mm/in
Α	65mm/2,56in
В	11mm/0.43in
С	30mm/1,18in
D	40mm/1,58in





DOWNLIGHT 5860

ModelMaterialFinishLEDPart. No.5860Stainless AISI 316Highly finished3x1,2W LED5860

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 5960 LED IP67



IP67 downlight for outdoor use. Made of turned stainless steel AISI 316.

LED: 3

Power consumtion: 3,6W Colour temperature: 3000k


CRI >85

Other colour temperatur on request.

Lightcone: 25° 16°, 40° on request. Lifetime >40.000h Fixing: 4 screws

For use with 350mA LED driver. Driver to be ordered separately.

	Dimensions mm/in		
Α	95mm/2.74in		
В	13mm/0.51in		
С	35mm/1,38in		
D	56mm/2.21in		





DOWNLIGHT 5960

ModelMaterialFinishBulbPart. No.5960Stainless AISI 316Highly finished3x1,2W LED5960

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

DOWNLIGHT 6600 SERIES LED IP67



The powerfull LEDs illuminate with a minimum of power consumption.

The lights are made of turned aluminum. The surface is anodized or white lacquered.

Light cone 16° lit-up area $\emptyset 2m$ Light cone $16 \times 43^{\circ}$ lit-up area $2 \times 5m$ See also page 80.

Power consumption: 3,6W

Colour temperature: 4500k, CRI >80

Lifetime of LED >40.000h Internal driver for 12V-24V DC

Dimensions: 65 x 30mm

Fixing: M5 screws AISI 316 or rivets 1500mm cable, other length on request

IP 67

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6600-02WH 16
Aluminum	White	3x1,2W	6600-02WH 16x43
Aluminum	Black	3x1,2W	6608-02 16
Aluminum	Black	3x1,2W	6608-02 16x43
Aluminum	Titan	3x1,2W	6609-02 16
Aluminum	Titan	3x1,2W	6609-02 16x43



SPREADER LED 6608-02

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

POWER LINE LED





POWER LINE LED 1060 SERIES



This series of lights is designed for general lighting, reading light or cabinet light. Quality light wherever you need it.


 $24\ LEDs$ give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctation and garanties steady light output.

Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50,000h.

The lights are made of aluminum with acrylic lens/cover.

The lights are surface mounted and need minimum space. Easy fixing with screws and clips.

Dimension	Switch	Volt	Part. No.
320 x 18 x 22mm	no	12V	1060WW 320 12V
320 x 18 x 22mm	no	24V	1060WW 320 24V
330 x 18 x 22mm	yes	12V	1060WWS 320 12V
330 x 18 x 22mm	yes	24V	1060WWS 320 24V

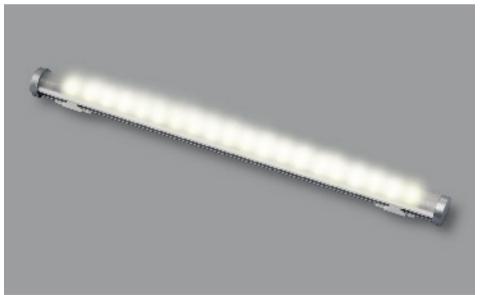

POWER LINE LED 1060WW

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

POWER LINE LED 1070 SERIES



This new series of LED lights is designed for general lighting, reading light or cabinet light. Quality light wherever you need it.

The 320mm light give the same warm white light as a 35W halogen bulb. An integrated LED driver regulates voltage fluctation and garanties steady light output.

Power consumption only 5W. The lifetime of the LEDs is more than 50.000h.

The lights are made of aluminum with acrylic lens/cover. The lights are surface mounted and need minimum space. Easy fixing with screws.

LINE LED 1070WWS

Dimension	Switch	Volt	Part. No.
320 x 30 x 12mm	yes	11-16V	1070WWS 320 12V
320 x 30 x 12mm	yes	23-29V	1070WWS 320 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


POWER LINE LED **6020 SERIES**



This series of lights is designed for general lighting, reading light, cabinet light, mashine room light or light in sail lockers. Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctation and garanties steady light output. Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50,000h.

The lights are made of aluminum and anodized, or anodized and white laquered. IP 65 rating makes these lights ideal for indoor and outdoor use. The lights are surface mounted and need minimum space. Fixing with two screws. Dimension 300 x 13 x 8mm, No switch,

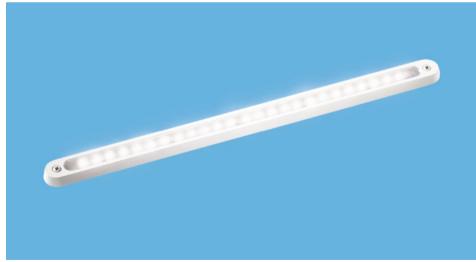

Material Finish Part, No. 12V Part, No. 24V Aluminum White 6020WHWW 12V 6020WHWW 24V Aluminum Titan 6029WW 12V 6029WW 24V

POWER LINE LED 6020WH WW

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


POWER LINE LED **6120 SERIES**



This series of lights is designed for general lighting, reading light, cabinet light, mashine room light or light in sail lockers. Quality light wherever you need it.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctation and garanties steady light output. Power consumption 12V - 2,5W, 24V - 3W. The lifetime of the LEDs is more than 50,000h.

The lights are made of aluminum and anodized, or anodized and white laquered. IP 65 rating makes these lights ideal for indoor and outdoor use. The lights are surface mounted and need minimum space. Fixing with two screws. Dimension 300 x 20 x 8mm, No switch,

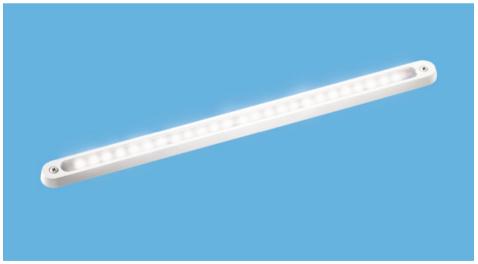


POWER LINE LED 6120WH WW

Material Finish Part, No. 12V Part, No. 24V Aluminum White 6120WHWW 12V 6120WHWW 24V Aluminum Titan 6129WW 12V 6129WW 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

LED COURTESY LIGHT



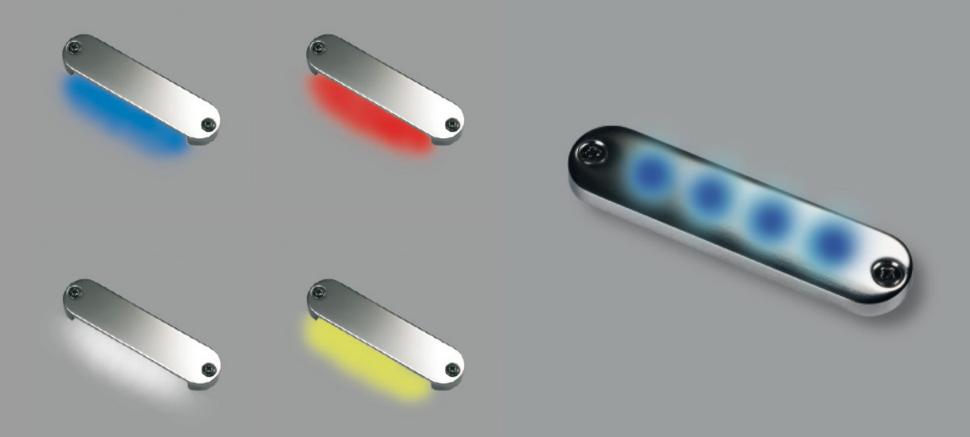


LED 1000 **CABIN** DENMARK

Surface mounted LED courtesy light made of white lacquered aluminum.

LED 1000 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LEDs is more than 50.000h.

	Dimensions mm/in	
Α	82mm/3.23in	
В	20mm/0.78in	
С	6mm/0,25in	



Material	Finish	LED	Volt	Part. No.
Aluminum	White lacquered	blue	12	1000WH BL IP65
Aluminum	White lacquered	red	12	1000WH RE IP65
Aluminum	White lacquered	white	12	1000WH WH IP65
Aluminum	White lacquered	yellow	12	1000WH YE IP65
Aluminum	White lacquered	blue	24	1000WH BL IP65 24V
Aluminum	White lacquered	red	24	1000WH RE IP65 24V
Aluminum	White lacquered	white	24	1000WH WH IP65 24V
Aluminum	White lacquered	yellow	24	1000WH YE IP65 24V



1000WHRE IP65

LED 1006


CABIN
DENMARK


Surface mounted LED courtesy light made of highly finished stainless steel.

LED 1006 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50,000h.

	Dimensions mm/in	
Α	82mm/3.23in	
В	20mm/0.78in	
С	6mm/0,25in	



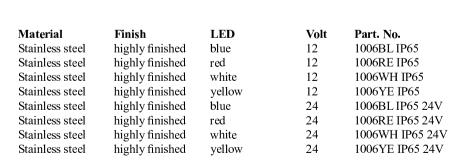



1006BL IP65



1006WH IP65



1006RE IP65



1006YE IP65

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


LED 1008 DENMARK

Surface mounted LED courtesy light made of black anodized aluminum.

LED 1008 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
Α	82mm/3,23in
В	20mm/0.78in
С	6mm/0,25in



Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1008BL IP65
Aluminum	black anodized	red	12	1008RE IP65
Aluminum	black anodized	white	12	1008WH IP65
Aluminum	black anodized	yellow	12	1008YE IP65
Aluminum	black anodized	blue	24	1008BL IP65 24V
Aluminum	black anodized	red	24	1008RE IP65 24V
Aluminum	black anodized	white	24	1008WH IP65 24V
Aluminum	black anodized	yellow	24	1008YE IP65 24V



1008YE IP65


LED 1009 **DENMARK**

Surface mounted LED courtesy light made of titan anodized aluminum.

LED 1009 series illuminates from bottom. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in		
Α	82mm/3.23in		
В	20mm/0.78in		
С	6mm/0,25in		



Finish	LED	Volt	Part. No.
titan anodized	blue	12	1009BL IP65
titan anodized	red	12	1009RE IP65
titan anodized	white	12	1009WH IP65
titan anodized	yellow	12	1009YE IP65
titan anodized	blue	24	1009BL IP65 24V
titan anodized	red	24	1009RE IP65 24V
titan anodized	white	24	1009WH IP65 24V
titan anodized	yellow	24	1009YE IP65 24V
	titan anodized titan anodized titan anodized titan anodized titan anodized titan anodized titan anodized	titan anodized blue titan anodized red titan anodized white titan anodized yellow titan anodized blue titan anodized red titan anodized white	titan anodized blue 12 titan anodized red 12 titan anodized white 12 titan anodized yellow 12 titan anodized blue 24 titan anodized red 24 titan anodized white 24



1009WH IP65

LED 1010


CABII
DENMARK


Surface mounted LED courtesy light made of white laquered aluminum.


LED 1010 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5 W. The lifetime of the LED's is more than 50,000h.

	Dimensions mm/in	
Α	82mm/3.23in	
В	20mm/0.78in	
С	5mm/0,20in	











5 24V 24V 5 24V 24V

1009WH WH IP65

1010WH YE IP65

Material Finish LED Part. No. Volt Aluminum White lacquered 12 1010WH BL IP65 blue Aluminum White lacquered red 12 1010WH RE IP65 Aluminum White lacquered 12 white 1010WH WH IP65 White lacquered yellow 12 Aluminum 1010WH YE IP65 White lacquered Aluminum blue 24 1010WH BL IP65 24V White lacquered Aluminum red 24 1010WH RE IP65 24V White lacquered Aluminum 24 1010WH WH IP65 24V white White lacquered yellow Aluminum 24 1010WH YE IP65 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


LED 1016 **DENMARK**

Surface mounted LED courtesy light made of highly finished stainless steel.

LED 1016 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in	
Α	82mm/3.23in	
В	20mm/0.78in	
С	5mm/0,20in	



Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1016BL IP65
Stainless steel	highly finished	red	12	1016RE IP65
Stainless steel	highly finished	white	12	1016H IP65
Stainless steel	highly finished	yellow	12	1016YE IP65
Stainless steel	highly finished	blue	24	1016BL IP65 24V
Stainless steel	highly finished	red	24	1016RE IP65 24V
Stainless steel	highly finished	white	24	1016WH IP65 24V
Stainless steel m	highly finished	yellow	24	1016YE IP65 24V



1016BL IP65


LED 1018 **DENMARK**


Surface mounted LED courtesy light made of black anodized aluminum.

LED 1018 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
Α	82mm/3,23in
В	20mm/0.78in
С	5mm/0,20in









1018RE IP65



1018YE IP65

Material	Finish	LED	Volt	Part. No.
Aluminum	black anodized	blue	12	1018BL IP65
Aluminum	black anodized	red	12	1018RE IP65
Aluminum	black anodized	white	12	1018WH IP65
Aluminum	black anodized	yellow	12	1018YE IP65
Aluminum	black anodized	blue	24	1018BL IP65 24V
Aluminum	black anodized	red	24	1018RE IP65 24V
Aluminum	black anodized	white	24	1018WH IP65 24V
Aluminum	black anodized	yellow	24	1018YE IP65 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

LED 1019

CABII
DENMARK


Surface mounted LED courtesy light made of titan anodized aluminum.


LED 1019 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50,000h.

	Dimensions mm/in
Α	82mm/3.23in
В	20mm/0.78in
C	5mm/0,20in







1019BL IP65



1019WH IP65

1019YE IP65

Material	Finish	LED	Volt	Part. No.
Material	1/1111511	LED	VOIL	
Aluminum	titan anodized	blue	12	1019BL IP65
Aluminum	titan anodized	red	12	1019RE IP65
Aluminum	titan anodized	white	12	1019WH IP65
Aluminum	titan anodized	yellow	12	1019YE IP65
Aluminum	titan anodized	blue	24	1019BL IP65 24V
Aluminum	titan anodized	red	24	1019RE IP65 24V
Aluminum	titan anodized	white	24	1019WH IP65 24V
Aluminum	titan anodized	yellow	24	1019YE IP65 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015


LED 1038 DENMARK

Semi surface mounted LED courtesy light made of anodized aluminum.

LED 1038 series illuminates from one lens with a 30° light cone. Ideal step light and night light for indoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	90mm/3.55in
В	25mm/0.99in
С	3mm/0.12in
D	12mm/0,45n



Material	Finish	LED	Volt	Part. No.
Aluminum	Black anodized	blue	12V	1038BL
Aluminum	Black anodized	red	12V	1038RE
Aluminum	Black anodized	white	12V	1038WH
Aluminum	Black anodized	yellow	12V	1038YE
Aluminum	Black anodized	blue	24V	1038BL 24V
Aluminum	Black anodized	red	24V	1038RE 24V
Aluminum	Black anodized	white	24V	1038WH 24V
Aluminum	Black anodized	yellow	24V	1038YE 24V



1038RE


LED 1039 **DENMARK**

Semi surface mounted LED courtesy light made of titan anodized aluminum.

LED 1039 series illuminates from one lens with a 30° light cone. Ideal step light and night light for indoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50.000h.

	Dimensions mm/in
A	90mm/3,55in
В	25mm/0.99in
С	3mm/0.12in
D	12mm/0.45in



Material	Finish	LED	Volt	Part. No.
Aluminum	Titan anodized	LED blue	12V	1039BL
Aluminum	Titan anodized	LED red	12V	1039RE
Aluminum	Titan anodized	LED white	12V	1039WH
Aluminum	Titan anodized	LED yellow	12V	1039YE
Aluminum	Titan anodized	LED blue	24V	1039BL 24V
Aluminum	Titan anodized	LED red	24V	1039RE 24V
Aluminum	Titan anodized	LED white	24V	1039WH 24V
Aluminum	Titan anodized	LED yellow	24V	1039YE 24V



1039BL

LED 1030-2

CABII
DENMARK

Semi surface mounted LED light made of brass.


* Custom made finish to fit your demand.

Very discrete step light and night light for classic yachts.

Illuminates from one opal defuser. No visible LED dots,

Power consumption is only 0,5W. The lifetime of the LED's is more than 50,000h,

	Dimensions mm/in
Α	90mm/3,55in
В	25mm/0.99in
С	3mm/0.12in
D	20mm/0,78in



Material	Finish	LED	Volt	Part. No.
Brass	Custom	blue	12V	1030-2*BL
Brass	Custom	red	12V	1030-2*RE
Brass	Custom	warm white	12V	1030-2*WW
Brass	Custom	yellow	12V	1030-2*YE
Brass	Custom	blue	24V	1030-2*BL 24V
Brass	Custom	red	24V	1030-2*RE 24V
Brass	Custom	warm white	24V	1030-2*WW 24V
Brass	Custom	yellow	24V	1030-2*YE 24V



09.11

1030-2CBL

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

LED 1039-2


CABII
DENMARK

Semi surface mounted LED light made of aluminum - titan anodized. Very discrete step light and night light for classic yachts.


Illuminates from one opal defuser. No visible LED dots.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50,000h.

	Dimensions mm/in
A	90mm/3.55in
В	25mm/0.99in
С	3mm/0.12in
D	20mm/0.78in



Material	Finish	LED	Volt	Part. No.
Aluminum	titan anodized	blue	12V	1039-2BL
Aluminum	titan anodized	red	12V	1039-2RE
Aluminum	titan anodized	warm white	12V	1039-2WW
Aluminum	titan anodized	yellow	12V	1039-2YE
Aluminum	titan anodized	blue	24V	1039-2BL 24V
Aluminum	titan anodized	red	24V	1039-2RE 24V
Aluminum	titan anodized	warm white	24V	1039-2WW 24V
Aluminum	titan anodized	yellow	24V	1039-2YE 24V

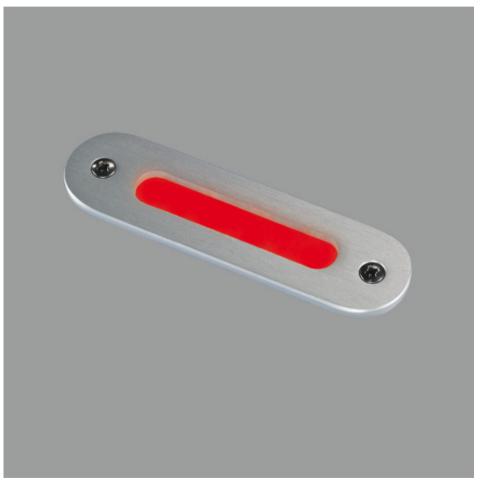

1039-2RE

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015





X-YACHTS OF DENMARK CURTESY LIGHT 1039-2RE IN X-65 LED 1116

CABII


DENMARK

Surface mounted LED courtesy light made of stainless steel,

LED 1116 series illuminates from 4 lenses. IP 65 rating makes these lights ideal for indoor and outdoor use.

Power consumption is only 0,5W. The lifetime of the LED's is more than 50,000h.

	Dimensions mm/in		
Α	82mm/3.23in		
В	20mm/0.78in		
С	5mm/0,20in		



Material	Finish	LED	Volt	Part. No.
Stainless steel	highly finished	blue	12	1116BL IP65
Stainless steel	highly finished	red	12	1116RE IP65
Stainless steel	highly finished	white	12	1116H IP65
Stainless steel	highly finished	yellow	12	1116YE IP65
Stainless steel	highly finished	blue	24	1116BL IP65 24V
Stainless steel	highly finished	red	24	1116RE IP65 24V
Stainless steel	highly finished	white	24	1116WH IP65 24V
Stainless steel m	highly finished	yellow	24	1116YE IP65 24V



09.13

1116RE IP65

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

MAST LED SPREADER LED BOOM LED









MAST LED 6900 SERIES



LED mast light for larger yachts.

The powerfull LEDs illuminate with a minimum of power consumption. The lights are made of turned aluminum. The surface is anodized or white lacquered.

Power consumption: 3,6W

Colour temperature: 4500k, CRI >80

On request: 3000k Lightcone: 16° On request: 25°, 40° Lifetime of LED >40.000h Internal driver for 12V-24V DC.

Dimensions: Ø95 x 40mm

Fixing: M5 screws AISI 316 1500mm cable, other length on request

IP 67

Mast bracket 6900BR to be ordered separately.

Model	Material	Finish	LED	Part. No.
MAST LED	Aluminum	White	3x1,2W	6900-02WH
MAST LED	Aluminum	Black	3x1,2W	6908-02
MAST LED	Aluminum	Titan	3x1,2W	6909-02



MAST LED 6908-02

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

SPREADER LED 6500 SERIES



LED spreader LED for larger yachts.

The powerfull LEDs illuminate with a minimum of power consumption.

The lights are made of turned aluminum. The surface is anodized or white lacquered. The design fits the curve and angel of modern spreaders.

Ligth cone 16° lit-up area Ø 2m Port/Starb 16 x 43° lit-up area 2 x 5m See also page 80.

Power consumption: 3,6W

Colour temperature: 4500k, CRI >80

Lifetime of LED >40,000h Internal driver for 12V-24V DC.

Dimensions: 65 x 44 x 30mm

Fixing: M5 screws AISI 316 or rivets 1500mm cable, other length on request

IP 67

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6500-02WH 16
Aluminum	White	3x1,2W	6500-02WH PORT
Aluminum	White	3x1,2W	6500-02WH STARB
Aluminum	Black	3x1,2W	6508-02 16
Aluminum	Black	3x1,2W	6508-02 PORT
Aluminum	Black	3x1,2W	6508-02 STARB
Aluminum	Titan	3x1,2W	6509-02 16
Aluminum	Titan	3x1,2W	6509-02 PORT
Aluminum	Titan	3x1.2W	6509-02 STARB



SPREADER LED 6508-02

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

SPREADER LED 6600 SERIES



LED spreader LED for larger yachts.

The powerfull LEDs illuminate with a minimum of power consumption.

The lights are made of turned aluminum. The surface is anodized or white lacquered. Circle housing fits the design of larger spreaders.

Ligth cone 16° lit-up area Ø2m Light cone 16 x 43° lit-up area 2 x 5m See also page 80.

Power consumption: 3,6W Colour temperature: 4500k, CRI >80

Lifetime of LED >40.000h Internal driver for 12V-24V DC

Dimensions: 65 x 30mm Fixing: M5 screws AISI 316 or rivets 1500mm cable, other length on request IP 67

Material	Finish	LED	Part. No.
Aluminum	White	3x1,2W	6600-02WH 16
Aluminum	White	3x1,2W	6600-02WH 16x43
Aluminum	Black	3x1,2W	6608-02 16
Aluminum	Black	3x1,2W	6608-02 16x43
Aluminum	Titan	3x1,2W	6609-02 16
Aluminum	Titan	3x1,2W	6609-02 16x43



SPREADER LED 6608-02

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015





SPREADER LED 6500 SERIES



BOOM LED 6000 SERIES



This series of lights is designed to give cockpit light from the boom.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.

Power consumption 12V - 2,5W, 24V - 3W The lifetime of the LEDs is more than 50,000h.

The lights are made of aluminum. The surface is anodized or white lacquered. The lights are surface mounted and fit into the gap in smaller booms.

Dimension 300 x 13 x 8mm. Fixing: M4 screws AISI 316 or rivets 6000mm cable, other length on request IP 65

BOOM LED 6039WW

MaterialFinishPart. No. 12VAluminumWhite6030WHWW 12VAluminumTitan6039WW 12V

Part. No. 24V 6030WHWW 24V 6039WW 24V

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

BOOM LED 6100 SERIES



This series of lights is designed to give cockpit light from the boom.

24 LEDs give the same warm white light as a 20W halogen bulb. An integrated LED driver regulates voltage fluctuation and guaranties steady light output.

Power consumption 12V - 2,5W, 24V - 3W.

Power consumption 12V - 2,5W, 24V - 3W The lifetime of the LEDs is more than 50,000h.

The lights are made of aluminum. The surface is anodized or white lacquered. The lights are surface mounted and fit into the gap in smaller booms.

Finish

White

Titan

Part, No. 12V

6139WW 12V

6130WHWW 12V

Dimension 300 x 20 x 8mm. Fixing: M4 screws AISI 316 or rivets 6000mm cable, other length on request IP 65

Material

Aluminum

Aluminum

Part. No. 24V 6130WHWW 24V 6139WW 24V




BOOM LED 6139WW

CABIN DENMARK - WWW.CABIN.DK - CABIN@CABIN.DK - PDF 01 2015

SPREADER LED - MAST LED - BOOM LED



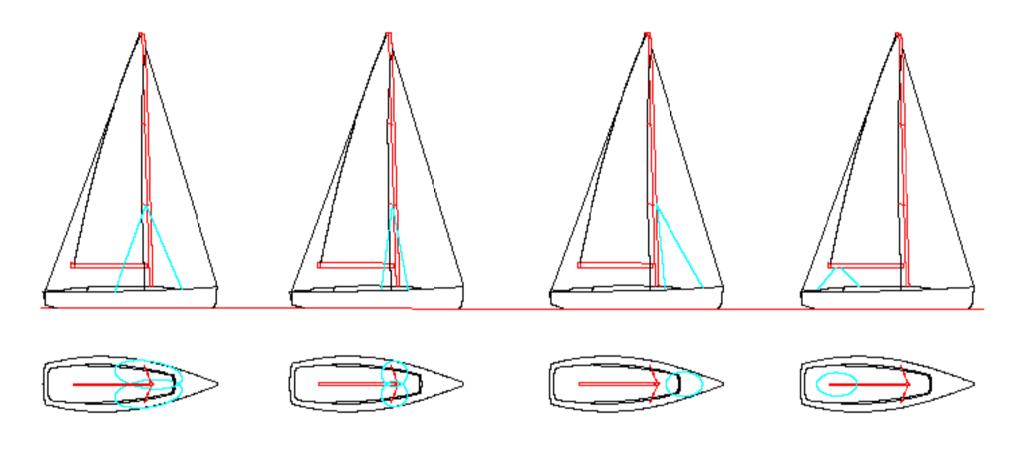

SPREADER LED 6500, 6600 SERIES LIGHT CONE 16 X 43° SPREADER ANGEL 21° SPREADER 6m OVER DECK LIT-UP AREA 2 X 5m SPREADER LED 6500, 6600 SERIES LIGHT CONE 16° SPREADER 6m OVER DECK LIT-UP AREA Ø 2m MAST LED 6900 SERIES LIGHT CONE 16° LIGHT 6m OVER DECK LIT-UP AREA Ø 2 X 3m BOOM LED 6000, 6100 SERIES LIGHT CONE 120° LIGHT 2m OVER DECK LIT-UP AREA Ø 2 - 3m