



Offshore 9-LED

Powered by 

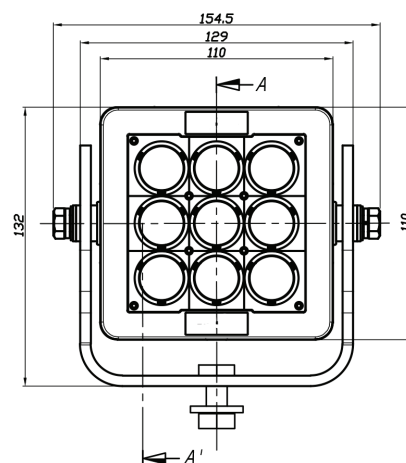

Also available in black

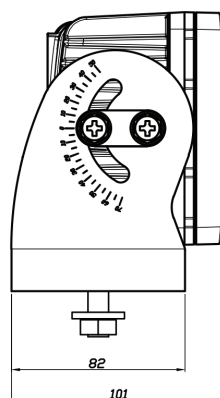

PRODUCT DETAILS

Raw Lumens	7,920
Effective Lumens	5,734
Current Draw	5.25A/12VDC, 2.62A/24VDC
Wattage	63W
Weight	1.68kg / 3.70lb
Beam Angle Options	10°, 25°, 40°, 60°, 90°, 30x65°
Color Temperature	5,700 Kelvin
Input Voltage	11 - 65VDC
Wattage per LED	7W
IP Rating	IP68/IP69K
Vibration Dampened & Shock Proof	60 Grms
EMC/EMI Rating	CISPR 25 - Class 1
Cable Length	6' x 16awg duplex boat cable
Lens	Polycarbonate
Environmental Coating	Interpon 810
Bracket Material	304 Stainless Steel
Finish Options	White or Black
Warranty	5 Years
Safety Standards Compliance	CE, ROHS, IEC 6247



Photo Credit: Blount Boats



NARROW FLOOD BEAM (25°)

Part No. ILBMB070925 (black), ILBMW070925 (white)



FLOOD BEAM (40°)

Part No. ILBMB070940 (black), ILBMW070940 (white)



WIDE FLOOD BEAM (60°)

Part No. ILBMB070960 (black), ILBMW070960 (white)



SUPER WIDE FLOOD BEAM (90°)

Part No. ILBMB070990 (black), ILBMW070990 (white)



ELLIPTICAL BEAM (30x65°)

Part No. ILBMB07093065 (black), ILBMW07093065 (white)

